

Biomedical Sensor Systems

Laboratory

Laboratory Tutorial: Oscillation Measurement

Place: BMT02002, Stremayrgasse 16, 2.OG

Supervised by: Christian Baumgartner, Theresa Rienmüller, Sonja Langthaler

Short Description:

In this lab students will perform oscillation measurements implemented by a piezo transducer and appropriate amplifier circuits. The signals will be analysed and interpreted using a storage oscilloscope.

Learning Objectives:

The students are able to ...

- ... understand the principles of sensors and amplifiers
- ... design appropriate amplifier circuits for given problems
- ... handle oscilloscopes and understand the functional principles
- ... to solve linear ordinary second-order differential equations with constant coefficients

Content

1. Theory	2
1.1. Analogue measurement	2
1.1.1. Operational Amplifier „OpAmp“	3
1.2. Transducers, sensors and actuators	4
1.1.2. Piezo sensors	5
1.3. Oscilloscope	8
1.3.1. Functional principle	8
1.3.2. Setup and basic functions	10
2. Preparatory activities for the lab	11
2.1. Dimensioning and completion appropriate amplifier circuits	11
2.2. Mathematical model of a (weak) damped oscillation	12
2.3. Oscilloscope	14
3. Implementation in the lab	14
3.1. Charge amplifier	14
3.2. Electrometer amplifier	14
4. Appendix	14

1. Theory

1.1. Analogue measurement

Why do we need amplifiers?

- measured potentials and currents often low
- sensor elements often load-sensitive
- tapping/transforming of measured variables

Requirements:

- low response to measured variable
- high resolution
small current or voltage signals and changes should be measurable
- defined response characteristics
the output signal should uniquely depend on the input signal
- good dynamic behavior
the output signal should follow the input signal as fast as possible

- output stable and insensitive to response
output signals should not be changed by following measurement instruments

1.1.1. Operational Amplifier „OpAmp“

Amplifiers can consist of one or several OpAmps. Figure 1 shows the simplified internal wiring of an OpAmp.

Differential input stage (yellow): differential amplifier with two inputs and constant current source; converts small potential differences to a proportional output current.

Amplifier stage (orange): transforms the small input current into a high output voltage; sets high off-load voltage amplification; frequency-dependent feedback of the capacitor ensures stability and determines the cutoff frequency.

Output stage (blue): often a push-pull, no voltage amplification, acts as current driver for the output, small output resistor which enables a high output current.


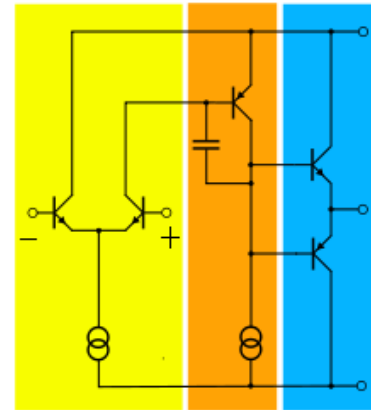


Figure 1: Simplified internal wiring of an OpAmp

Ideal OpAmps are assumed to have a voltage-controlled power supply with open load voltage gain $V_0 \rightarrow \infty$ (see Figure 2). **Real** OpAmps have an open loop voltage gain of about 10^4 to 10^7 .

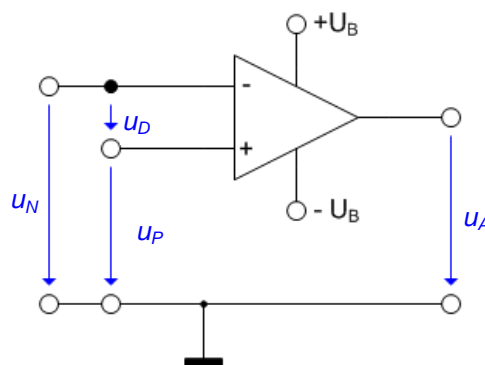

$$u_A = V_0 \cdot (u_P - u_N) = V_0 \cdot u_D$$

$$\begin{aligned} \text{ideal: } V_0 &\rightarrow \infty \\ \text{real: } V_0 &\approx 10^4 \text{ to } 10^7 \end{aligned}$$

Figure 2: Equivalent circuit diagram OpAmp

The transfer characteristic of an OpAmp is illustrated in Figure 3. u_A is **limited by the supply voltage** $U_B \rightarrow$ so $u_{A,\max}$ is always smaller than U_B !




Figure 3: Transfer characteristic OpAmp, U_{D0} : input offset voltage

1.2. Transducers, sensors and actuators

Transducers convert one form of energy to another form of energy. If a transducer converts a measurable quantity (mechanical, thermal, ...) into an electrical signal (voltage, current) we will call it a sensor. In turn, a transducer is referred to as an actuator in case electrical signals are converted into other energy forms, for example mechanical movement, light or sound.

A sensor is the primary element in a measurement chain. Sensors can be divided into active and passive sensors. Active sensors convert non-electrical energy into electrical energy (voltage) without auxiliary voltage. Passive sensors change their electrical properties under the influence of non-electrical variables. Table 1 lists some active and passive sensors and their variables.

Active sensors	non-electrical parameter	
thermal element	temperature, radiation	
photo element	light, temperature	
electrochemical element	ph-Value, redox potential	
piezo sensor	force, pressure, tension, acceleration, temperature	
induction sensor	rate of rotation, acceleration	
Passive sensors	influenced electrical parameter	non-electrical parameter
potentiometer	ohmic resistance	length, angle
strain gauge	ohmic resistance	force, pressure, length, angle, strain, torsion
photo resistor, photo transistor, photo diode	ohmic resistance	light variables
resistance thermometer	ohmic resistance	length, angle
transformer	magnetic coupling	length, angle
Hall probe	voltage	length, angle
induction sensor	inductance	length, angle
capacitive sensor	capacitance	length, angle
magnetic sensor	magnetic field	length, angle

Table 1: Overview active and passive sensors

1.1.2. Piezo sensors

Piezoelectric effect

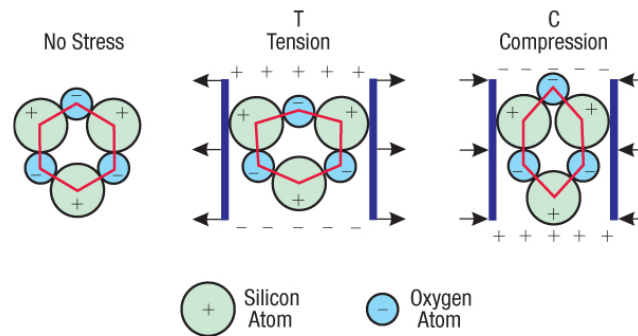


Figure 4: Piezoelectric effect in Quartz

Figure 4 shows the piezoelectric effect of a quartz molecule. Mechanical deformation like tension or compression causes a charge shifting and thereby a voltage. Reversely, an applied voltage leads to a deformation of the material. Thus, piezoelectric crystals and ceramics can be both, actuators as well as sensors.

Piezo Sensors

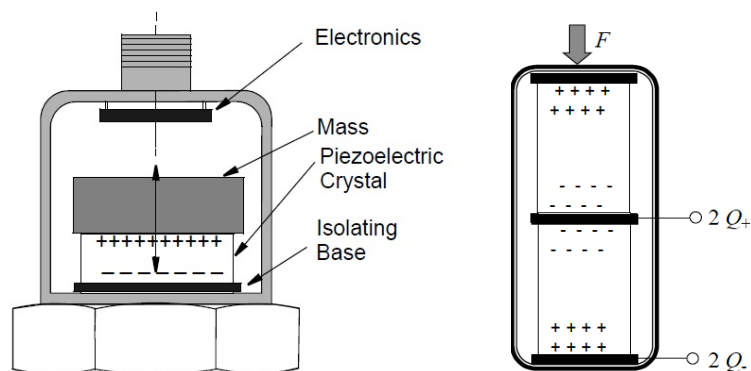


Figure 5: Piezo Sensor for acceleration

Piezo sensors (see Figure 5) can be used to determine a variety of physical variables (e.g. pressure, acceleration, temperature, strain or force). The function principles are mainly based on the longitudinal effect, transversal effect and shear effect. Figure 5 illustrates the longitudinal effect, caused by two crystals put together, which results in a force meter. The charge is proportional to the applied force, at least in a limited area.

The charge shift is characterised by displacement of the shift flux density D

$$D = \frac{Q}{A} \quad (1)$$

$$Q = k_p \cdot F, \quad (2)$$

where Q is the charge and A the area. The coefficient k_p depicts the piezoelectric constant, also called piezo modul and F is the force.

The charges are not directly measurable and have to be converted to a proportional voltage U_q by a capacitor. Thereby charge Q can be written as

$$Q = C U_q \Rightarrow U_q = \frac{Q}{C} = \frac{k_p \cdot F}{C} \quad (3)$$

Therefore amplifiers with a great high-ohmic input are applicable, so called electrometer amplifiers (non-inverting amplifier) and charge amplifiers.

Electrometer amplifier

The input resistance R_e of the amplifier as well as the loss resistance R_p have to be very high-ohmic. Otherwise the charge would be compensated quickly. The time constant of the measurement setup as shown in Figure 6 can be calculated as follows

$$\tau = R_{ges} C_{ges} = \left(\frac{R_e \cdot R_p}{R_e + R_p} \right) \cdot (C_0 + C_L + C_e) \quad R_e \parallel R_p \rightarrow \infty \quad (4)$$

and the output voltage U_a is

$$U_a = U_q \left(1 + \frac{R_2}{R_1} \right) = \frac{Q}{C_{ges}} \cdot \left(1 + \frac{R_2}{R_1} \right) = F \cdot \frac{k_p}{C_{ges}} \cdot \left(1 + \frac{R_2}{R_1} \right). \quad (5)$$

Attention:

- $U_q = f(F)$
- unavoidable, external switching capacities lower sensitivity

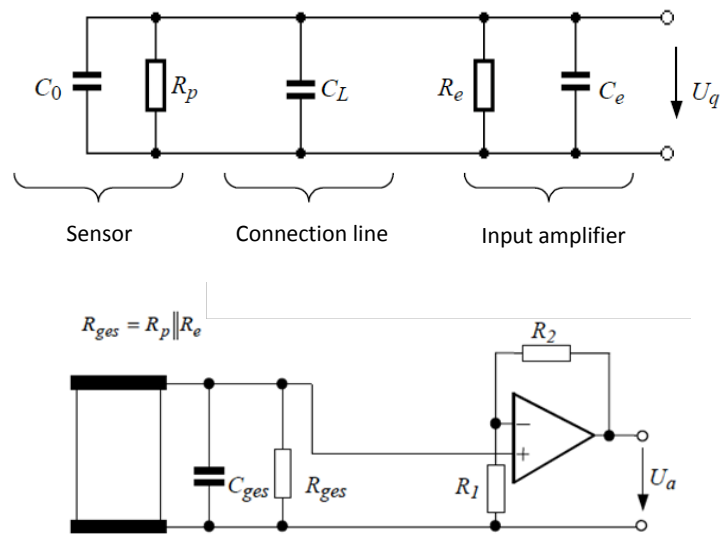


Figure 6: Piezo sensor with electrometer amplifier

Charge amplifier

The charge amplifier converts the charge quantity, proportional to the force, into the voltage u_a . The current $i_q(t)$ is directly derived from the charge shifting and the current $i_k(t)$ from the output voltage of the OpAmp, and the capacitor C . The equations for $i_q(t)$ and $i_k(t)$ can be written as follows

$$i_q(t) = \frac{dQ}{dt} \quad (6)$$

$$i_k(t) = C \cdot \frac{du_a(t)}{dt} \quad (7)$$

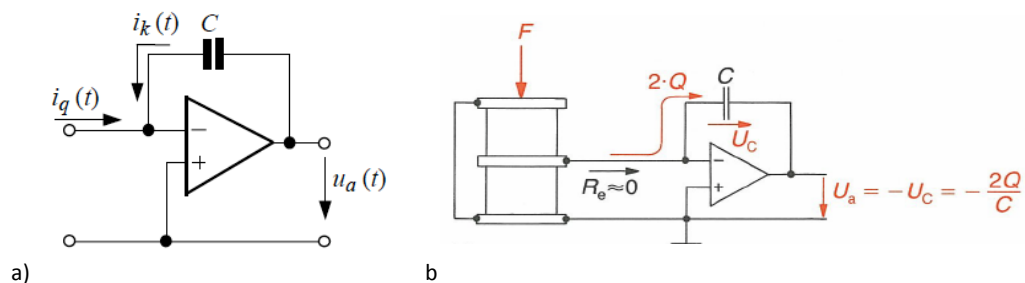


Figure 7: a) Equivalent circuit diagram charge amplifier b) Piezo sensor with charge amplifier

As shown in Figure 7 a), $i_q(t) + i_k(t) \approx 0$. After integration, the equation for u_o of the charge amplifier is given by

$$u_o(t) = -\frac{1}{C} \int_0^T i_q(t) dt = -\frac{Q}{C} = -\frac{k_p \cdot F}{C}. \quad (8)$$

C is the only decisive capacitance for u_o (instead of the parasitic capacitances (C_0 , C_L , C_e)). A disadvantage is the restriction to the measurement of alternating parameters, because of charge changes over time.

1.3. Oscilloscope

1.3.1. Functional principle

Oscilloscopes are used to display the change of an electrical signal over time. Basically, all procedures which can be reproduced as a voltage time curve can also be displayed by an oscilloscope. The observed waveform can be analyzed for shape parameters such as amplitude, frequency, rise time, time interval, phase shift, distortion and others.

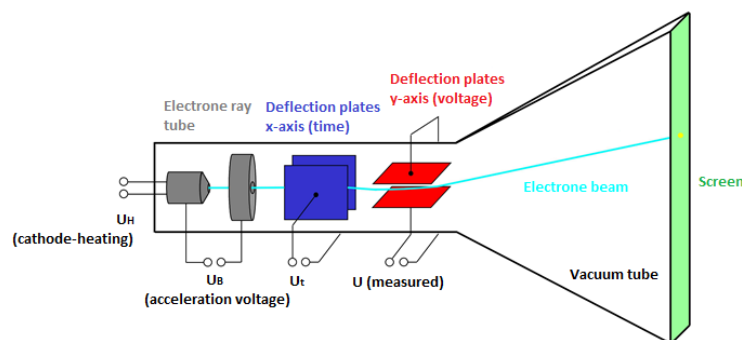


Figure 8: Basic construction analogue oscilloscope

Before the advent of digital electronics, analogue oscilloscopes (Figure 8) used electrode ray tubes to display the signals. Thereby, an electron emitter generates free electrons which are focused and accelerated by high voltage U_B . The measured signal is amplified and is used to diffract the electron beam by deflection plates. Finally the deflected electrons come upon the screen and induce the fluorescing screen material to light up.

In principle, a digital oscilloscope works like an analogue, but the measured signals are converted by an ADC (analog digital converter) before processing and the signals can be stored for further investigations. The digital-analog conversion enables the use of additional implemented analysis software (FFT, average, ...), the autoset-autorange function, pre-trigger and allows the recording of slow signal curves. Several ADCs are used to illustrate high frequency signals accurately. In order to

be able to represent signals accurately and to avoid aliasing, the conditions of the **sampling theorem** have to be observed.

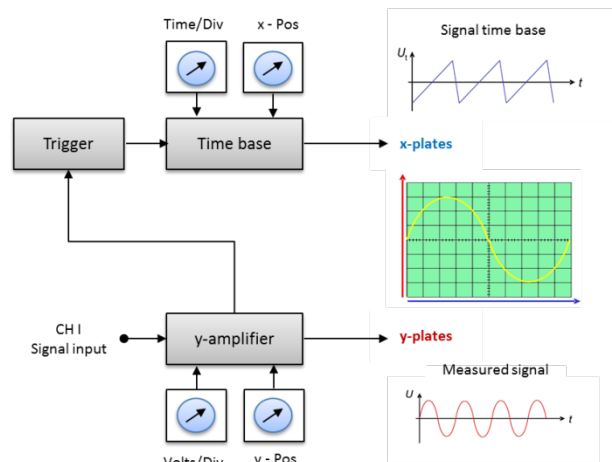


Figure 9: Functional principle oscilloscope

To obtain a temporal representation of the input signal, the light point has to move with constant speed, horizontally along the screen. This happens thanks to a sawtooth voltage U_t generated by the time base (see Figure 9). During the falling edge of U_t the light point is faded out. The rise time of this voltage sets the time dimension of the X-axis. K_t (e.g. $0,2 \mu\text{s}/\text{raster element}$) gives the time per raster element or cm of the X-axis.

The **Trigger** starts the sawtooth voltage, which generates the stationary image. To obtain the same sequence in all periods, the measured signal U and U_t have to run paired. Therefore a trigger level is used, whereby the sawtooth voltage gets started as soon as U exceeds this level.

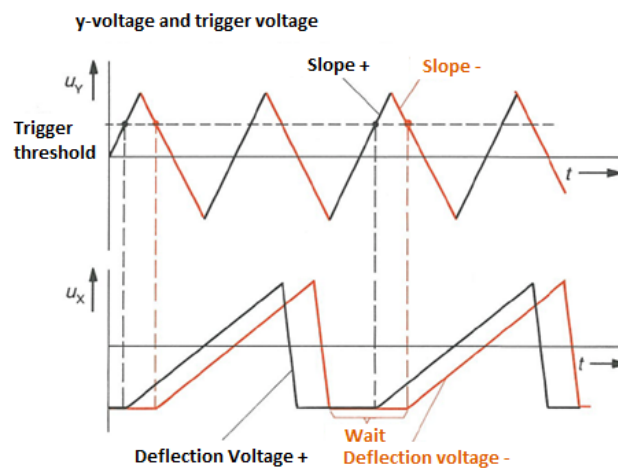


Figure 10: Trigger function

x-y mode: most modern oscilloscopes have several inputs for voltages which can be used to plot one varying voltage versus another. In x-y mode the oscilloscope have the same deflection sensitivity for both the x- and y-direction. This is especially useful for graphing I-V curves (current versus voltage

characteristics) for components such as diodes. Lissajous figures for example are used to track phase differences between multiple input signals and can be used for frequency measurement as illustrated in Figure 11.

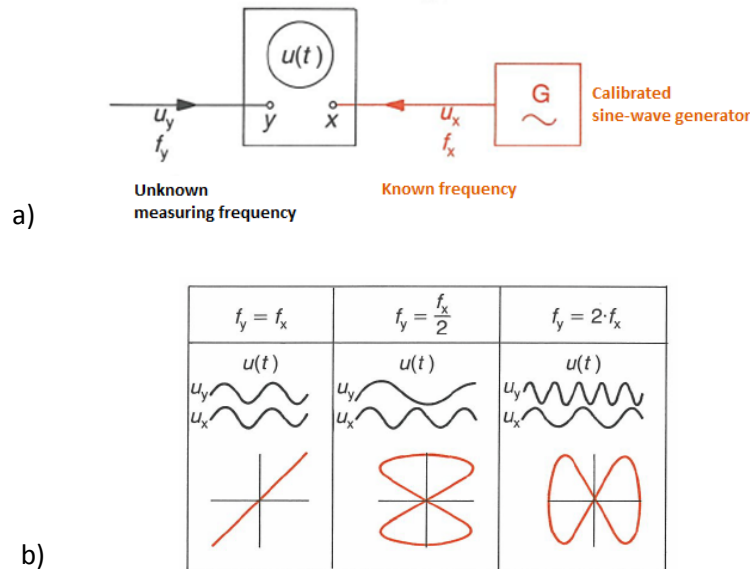


Figure 11: a) Measuring setup for frequency measurement. b) Lissajous figures.

1.3.2. Setup and basic functions

The basic oscilloscope is typically divided into four sections: the display, vertical controls, horizontal controls and trigger controls. In addition to the screen, most display sections are equipped with three basic controls: a focus knob, an intensity knob and a beam finder button.

The vertical section controls the amplitude of the displayed signal. This section carries a Volts-per-Division (Volts/Div) selector knob, an AC/DC/Ground selector switch and the vertical (primary) input for the instrument. Additionally, this section is typically equipped with the vertical beam position knob.

The horizontal section controls the time base or "sweep" of the instrument. The primary control is the Seconds-per-Division (Sec/Div) selector switch. Also included is a horizontal input for plotting dual X-Y axis signals. The horizontal beam position knob is generally located in this section.

The trigger section controls the start event of the sweep and can be set to automatically restart after each sweep or it can be configured to respond to an internal or external event. The principal controls of this section will be the source and coupling selector switches. An external trigger input (EXT Input) and level adjustment will also be included.

2. Preparatory activities for the lab

As preparatory activities for the lab you should:

- I. dimension appropriate amplifier circuits for oscillation measurement with a piezo element (see section 2.1). You should be able to describe principal differences and advantages as well as disadvantages of the circuits.
- II. mathematically establish the descriptive equation of a (weak) damped oscillation (see section 2.2)
- III. get familiar with the functional principles of an oscilloscope

2.1. Dimensioning and completion of appropriate amplifier circuits

Figure 12 and Figure 13 illustrate incomplete circuitries of a charge and electrometer amplifier, respectively. Dimension and complete the circuitry by adding resistors under the following conditions:

- the sensor will be the miniature-accelerometer sensor KS93, with charge changing proportional to acceleration
- measured frequencies are in the range of 40 to 80 Hz
- a LM324 will be used as operational amplifier
- capacitors are available in the range of 1 pF to 47 pF
- resistors up to 10 M Ω are available

useful hints:

- you can find all data sheets in the appendix
- consider, the input of the op-amp should always be on defined levels
- also consider the power supply of the LM324

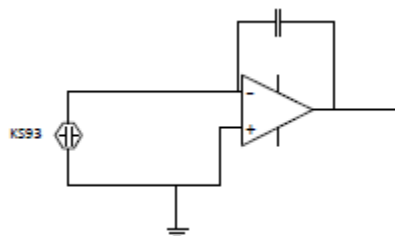


Figure 12: Incomplete charge amplifier

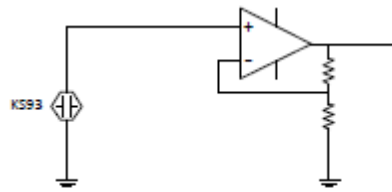


Figure 13: Incomplete electrometer amplifier

2.2. Mathematical model of a (weak) damped oscillation

Together with the amplifier circuit the piezo sensor provides an electrical signal, corresponding to a damped oscillation. During the lab you will be concerned with oscillations $u(t)$ with decreasing amplitudes A over time. A (linear) signal progression can be described by the following mathematical equation:

$$u(t) = A \cdot e^{-\frac{t}{\tau}} \cdot \left[\cos(\omega t) + \frac{1}{\omega \tau} \cdot \sin(\omega t) \right], \quad (9)$$

where A is the amplitude at time $t = 0$, ω the angular frequency of the oscillation and τ the decay coefficient. The differential equation of a free damped oscillation is given by

$$u'' + \frac{k_1}{m} u' + \frac{k_2}{m} u = 0 \quad (10)$$

where $u(t)$ is the deflection at time t , k_1 is the damping coefficient, k_2 the spring constant and m the mass of the swinging body. The right side of the equation is set to 0, because of a free oscillation without an exterior time excitation. A quite handy substitution with

$$\frac{2}{\tau} = \frac{k_1}{m} \quad \text{and} \quad \omega^2 = \frac{k_2}{m}$$

and the consideration of the initial conditions $u(t=0) = u_0 = A$ (deflection at time $t=0$) as well as $u'(t=0) = u'_0 = 0$ (the body will not be given an initial speed) lead – after appropriate computation – to equation 9.

Execute that computation and demonstrate that equation 9 is the result of equation 10 regarding the

- initial conditions
- the fact that it's a weak damped oscillation
- correlating given substitutions

Please note: The calculation should be performed **solely** in the time domain without using laplace transforms.

useful hints:

Make use of the fact that it's a weak damped oscillation where ω can be set as

$$\omega \gg \frac{1}{\tau^2}$$

consistently you can set expressions like

$$\sqrt{\frac{1}{\tau^2} - \omega^2} = j \cdot \sqrt{\omega^2 - \frac{1}{\tau^2}} \cong j \cdot \sqrt{\omega^2} = j \cdot \omega$$

On the basis of your measured results you will determine parameters A , ω and τ . In advance, plan ahead how the determination respectively the calculation can be carried out. Keep in mind that you have to expect corresponding fluctuation ranges for ω and τ . Hence you should average over several periods.

For this purpose, assume an oscillation as shown in Figure 14:

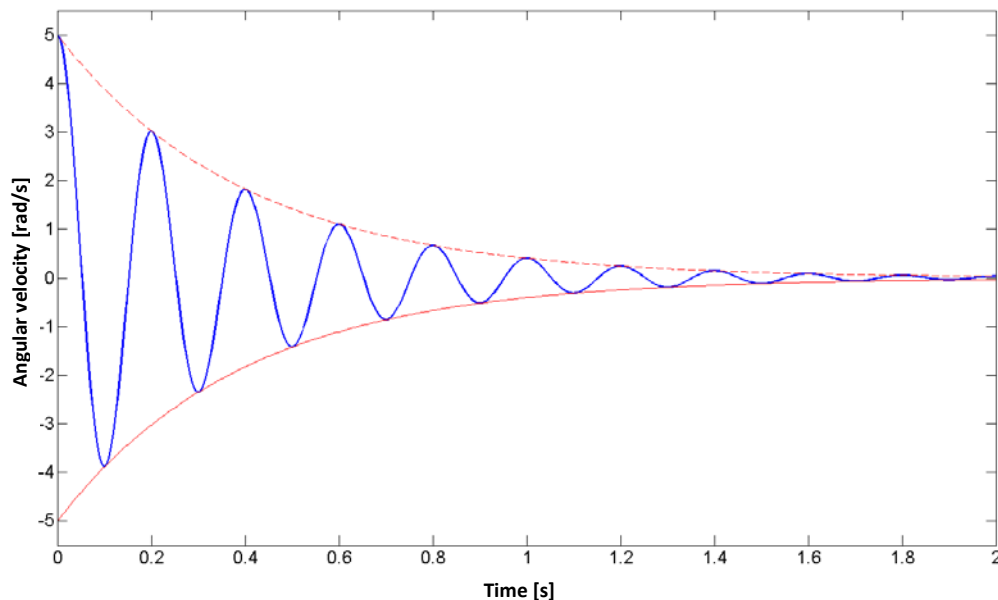


Figure 14: Example of an oscillation course $u(t)$ out of equation 9, with decaying amplitude over time ($A \cdot e^{-\frac{t}{\tau}}$). In this case parameter $A = 5$ rad/s, $\tau = 2,5$ s and $\omega = 5$ 1/s. The red lines show the contour of the oscillation.

2.3. Oscilloscope

The signals will be measured with a digital storage oscilloscope. Could the signals also be measured by an analogue oscilloscope? Explain your answer.

3. Implementation in the lab

3.1. Charge amplifier

Tension the ruler at 10 cm and 20 cm. Deflect it slightly first (1) and greater secondly (2) and record the oscillation until the ruler is resting again.

Please note: in case of large oscillations the saturation region can be reached depending on the dimension of your charge amplifier!

Conduct and answer following tasks and questions for both deflections:

- Implement your designed charge amplifier circuit on a patch panel.
- Metrologically determine the frequency of the fundamental oscillation with the help of an oscilloscope.
- Does the frequency remain constant?
- Determine the damping coefficient under assuming a damped harmonic oscillation.
- Additionally, switch a capacitor parallel to the input. The capacitor should simulate a changed interconnected capacitance. Are there changes in the output signal? Justify your observation.

3.2. Electrometer amplifier

Repeat tasks a) to e) of 3.1 with an electrometer amplifier.

4. Appendix

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

Single Supply Quad Operational Amplifiers

The LM324 series are low-cost, quad operational amplifiers with true differential inputs. They have several distinct advantages over standard operational amplifier types in single supply applications. The quad amplifier can operate at supply voltages as low as 3.0 V or as high as 32 V with quiescent currents about one-fifth of those associated with the MC1741 (on a per amplifier basis). The common mode input range includes the negative supply, thereby eliminating the necessity for external biasing components in many applications. The output voltage range also includes the negative power supply voltage.

- Short Circuited Protected Outputs
- True Differential Input Stage
- Single Supply Operation: 3.0 V to 32 V (LM224, LM324, LM324A)
- Low Input Bias Currents: 100 nA Maximum (LM324A)
- Four Amplifiers Per Package
- Internally Compensated
- Common Mode Range Extends to Negative Supply
- Industry Standard Pinouts
- ESD Clamps on the Inputs Increase Ruggedness without Affecting Device Operation

MAXIMUM RATINGS (T_A = +25°C, unless otherwise noted.)


Rating	Symbol	LM224 LM324, LM324A	LM2902, LM2902V	Unit
Power Supply Voltages Single Supply Split Supplies	V _{CC} V _{CC} , V _{EE}	32 ±16	26 ±13	Vdc
Input Differential Voltage Range (Note 1)	V _{IDR}	±32	±26	Vdc
Input Common Mode Voltage Range	V _{ICR}	-0.3 to 32	-0.3 to 26	Vdc
Output Short Circuit Duration	t _{SC}	Continuous		
Junction Temperature	T _J	150		°C
Storage Temperature Range	T _{stg}	-65 to +150		°C
Operating Ambient Temperature Range	T _A			°C
LM224		-25 to +85		
LM324, 324A		0 to +70		
LM2902			-40 to +105	
LM2902V, NCV2902			-40 to +125	

1. Split Power Supplies.




ON Semiconductor®


<http://onsemi.com>



PDIP-14
N SUFFIX
CASE 646




SO-14
D SUFFIX
CASE 751A



TSSOP-14
DTB SUFFIX
CASE 948G

PIN CONNECTIONS

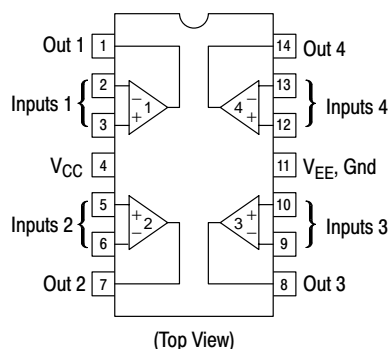

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 9 of this data sheet.

DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 10 of this data sheet.

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

ELECTRICAL CHARACTERISTICS ($V_{CC} = 5.0\text{ V}$, $V_{EE} = \text{Gnd}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Characteristics	Symbol	LM224			LM324A			LM324			LM2902			LM2902V/NCV2902			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage $V_{CC} = 5.0\text{ V}$ to 30 V (26 V for LM2902, V), $V_{ICR} = 0\text{ V}$ to $V_{CC} - 1.7\text{ V}$, $V_O = 1.4\text{ V}$, $R_S = 0\ \Omega$ $T_A = 25^\circ\text{C}$ $T_A = T_{\text{high}}$ (Note 2) $T_A = T_{\text{low}}$ (Note 2)	V_{IO}	–	2.0	5.0	–	2.0	3.0	–	2.0	7.0	–	2.0	7.0	–	2.0	7.0	mV
Average Temperature Coefficient of Input Offset Voltage $T_A = T_{\text{high}}$ to T_{low} (Notes 2 and 4)	$\Delta V_{IO}/\Delta T$	–	7.0	–	–	7.0	30	–	7.0	–	–	7.0	–	–	7.0	–	$\mu\text{V}/^\circ\text{C}$
Input Offset Current $T_A = T_{\text{high}}$ to T_{low} (Note 2)	I_{IO}	–	3.0	30	–	5.0	30	–	5.0	50	–	5.0	50	–	5.0	50	nA
Average Temperature Coefficient of Input Offset Current $T_A = T_{\text{high}}$ to T_{low} (Notes 2 and 4)	$\Delta I_{IO}/\Delta T$	–	10	–	–	10	300	–	10	–	–	10	–	–	10	–	$\text{pA}/^\circ\text{C}$
Input Bias Current $T_A = T_{\text{high}}$ to T_{low} (Note 2)	I_{IB}	–	–90	–150	–	–45	–100	–	–90	–250	–	–90	–250	–	–90	–250	nA
Input Common Mode Voltage Range (Note 3) $V_{CC} = 30\text{ V}$ (26 V for LM2902, V) $T_A = +25^\circ\text{C}$ $T_A = T_{\text{high}}$ to T_{low} (Note 2)	V_{ICR}	0	–	28.3	0	–	28.3	0	–	28.3	0	–	24.3	0	–	24.3	V
Differential Input Voltage Range	V_{IDR}	–	–	V_{CC}	–	–	V_{CC}	–	–	V_{CC}	–	–	V_{CC}	–	–	V_{CC}	V
Large Signal Open Loop Voltage Gain $R_L = 2.0\text{ k}\Omega$, $V_{CC} = 15\text{ V}$, for Large V_O Swing $T_A = T_{\text{high}}$ to T_{low} (Note 2)	A_{VOL}	50	100	–	25	100	–	25	100	–	25	100	–	25	100	–	V/mV
Channel Separation $10\text{ kHz} \leq f \leq 20\text{ kHz}$, Input Referenced	CS	–	–120	–	–	–120	–	–	–120	–	–	–120	–	–	–120	–	dB
Common Mode Rejection, $R_S \leq 10\text{ k}\Omega$	CMR	70	85	–	65	70	–	65	70	–	50	70	–	50	70	–	dB
Power Supply Rejection	PSR	65	100	–	65	100	–	65	100	–	50	100	–	50	100	–	dB

2. LM224: $T_{\text{low}} = -25^\circ\text{C}$, $T_{\text{high}} = +85^\circ\text{C}$
 LM324/LM324A: $T_{\text{low}} = 0^\circ\text{C}$, $T_{\text{high}} = +70^\circ\text{C}$
 LM2902: $T_{\text{low}} = -40^\circ\text{C}$, $T_{\text{high}} = +105^\circ\text{C}$
 LM2902V & NCV2902: $T_{\text{low}} = -40^\circ\text{C}$, $T_{\text{high}} = +125^\circ\text{C}$
NCV2902 is qualified for automotive use.

3. The input common mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3 V. The upper end of the common mode voltage range is $V_{CC} - 1.7\text{ V}$.
4. Guaranteed by design.

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

ELECTRICAL CHARACTERISTICS ($V_{CC} = 5.0\text{ V}$, $V_{EE} = \text{Gnd}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Characteristics	Symbol	LM224			LM324A			LM324			LM2902			LM2902V/NCV2902			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Output Voltage– High Limit ($T_A = T_{\text{high}}$ to T_{low}) (Note 5) $V_{CC} = 5.0\text{ V}$, $R_L = 2.0\text{ k}\Omega$, $T_A = 25^\circ\text{C}$ $V_{CC} = 30\text{ V}$ (26 V for LM2902, V), $R_L = 2.0\text{ k}\Omega$ $V_{CC} = 30\text{ V}$ (26 V for LM2902, V), $R_L = 10\text{ k}\Omega$	V_{OH}	3.3	3.5	–	3.3	3.5	–	3.3	3.5	–	3.3	3.5	–	3.3	3.5	–	V
Output Voltage – Low Limit, $V_{CC} = 5.0\text{ V}$, $R_L = 10\text{ k}\Omega$, $T_A = T_{\text{high}}$ to T_{low} (Note 5)	V_{OL}	–	5.0	20	–	5.0	20	–	5.0	20	–	5.0	100	–	5.0	100	mV
Output Source Current ($V_{ID} = +1.0\text{ V}$, $V_{CC} = 15\text{ V}$) $T_A = 25^\circ\text{C}$ $T_A = T_{\text{high}}$ to T_{low} (Note 5)	I_{O+}	20	40	–	20	40	–	20	40	–	20	40	–	20	40	–	mA
Output Sink Current ($V_{ID} = -1.0\text{ V}$, $V_{CC} = 15\text{ V}$) $T_A = 25^\circ\text{C}$ $T_A = T_{\text{high}}$ to T_{low} (Note 5) $(V_{ID} = -1.0\text{ V}$, $V_O = 200\text{ mV}$, $T_A = 25^\circ\text{C})$	I_{O-}	10	20	–	10	20	–	10	20	–	10	20	–	10	20	–	mA
Output Short Circuit to Ground (Note 6)	I_{SC}	–	40	60	–	40	60	–	40	60	–	40	60	–	40	60	mA
Power Supply Current ($T_A = T_{\text{high}}$ to T_{low}) (Note 5) $V_{CC} = 30\text{ V}$ (26 V for LM2902, V), $V_O = 0\text{ V}$, $R_L = \infty$ $V_{CC} = 5.0\text{ V}$, $V_O = 0\text{ V}$, $R_L = \infty$	I_{CC}	–	–	3.0	–	1.4	3.0	–	–	3.0	–	–	3.0	–	–	3.0	mA
		–	–	1.2	–	0.7	1.2	–	–	1.2	–	–	1.2	–	–	1.2	mA

5. LM224: $T_{\text{low}} = -25^\circ\text{C}$, $T_{\text{high}} = +85^\circ\text{C}$
 LM324/LM324A: $T_{\text{low}} = 0^\circ\text{C}$, $T_{\text{high}} = +70^\circ\text{C}$
 LM2902: $T_{\text{low}} = -40^\circ\text{C}$, $T_{\text{high}} = +105^\circ\text{C}$
 LM2902V & NCV2902: $T_{\text{low}} = -40^\circ\text{C}$, $T_{\text{high}} = +125^\circ\text{C}$
NCV2902 is qualified for automotive use.

6. The input common mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3 V. The upper end of the common mode voltage range is $V_{CC} - 1.7\text{ V}$.

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

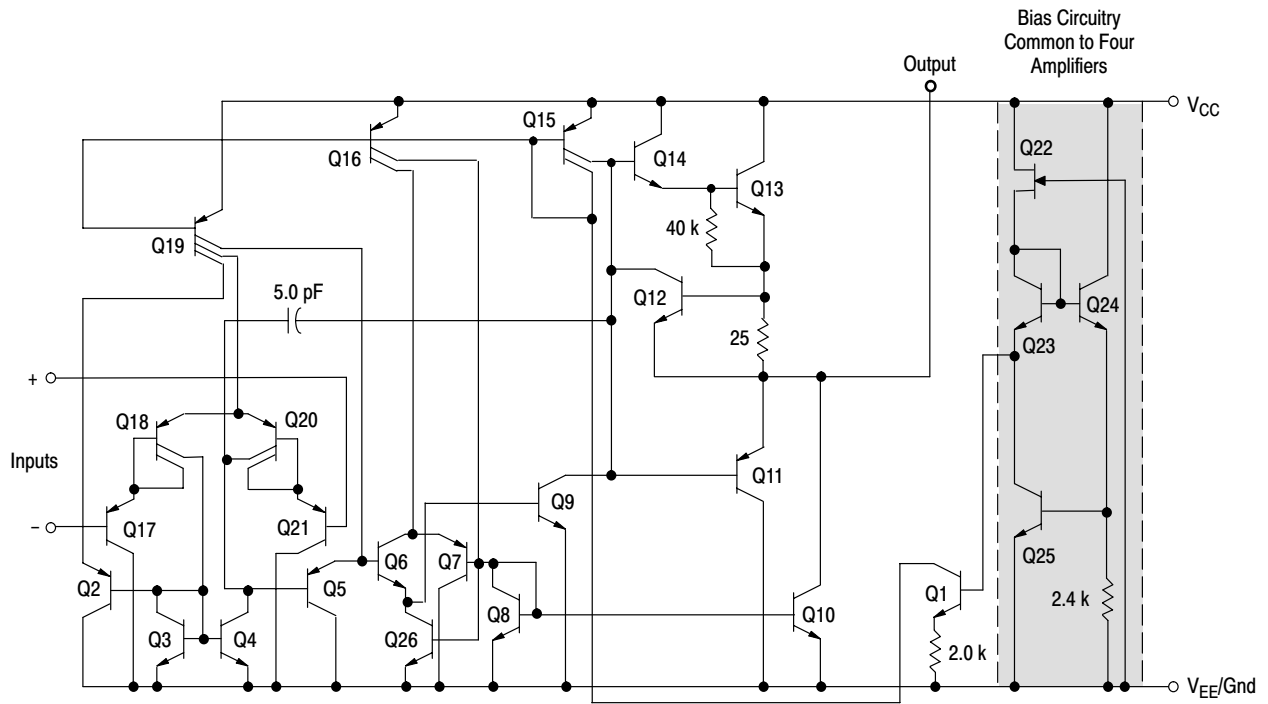


Figure 1. Representative Circuit Diagram
(One-Fourth of Circuit Shown)

CIRCUIT DESCRIPTION

The LM324 series is made using four internally compensated, two-stage operational amplifiers. The first stage of each consists of differential input devices Q20 and Q18 with input buffer transistors Q21 and Q17 and the differential to single ended converter Q3 and Q4. The first stage performs not only the first stage gain function but also performs the level shifting and transconductance reduction functions. By reducing the transconductance, a smaller compensation capacitor (only 5.0 pF) can be employed, thus saving chip area. The transconductance reduction is accomplished by splitting the collectors of Q20 and Q18. Another feature of this input stage is that the input common mode range can include the negative supply or ground, in single supply operation, without saturating either the input devices or the differential to single-ended converter. The second stage consists of a standard current source load amplifier stage.

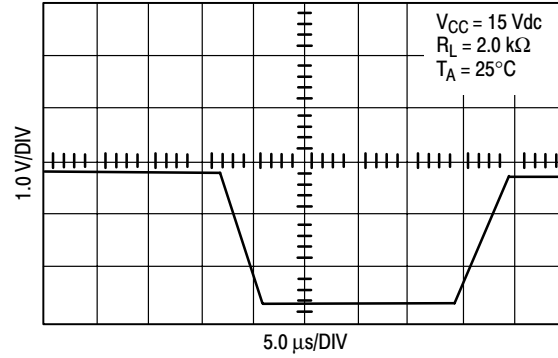


Figure 2. Large Signal Voltage Follower Response

Each amplifier is biased from an internal-voltage regulator which has a low temperature coefficient thus giving each amplifier good temperature characteristics as well as excellent power supply rejection.



Figure 3.

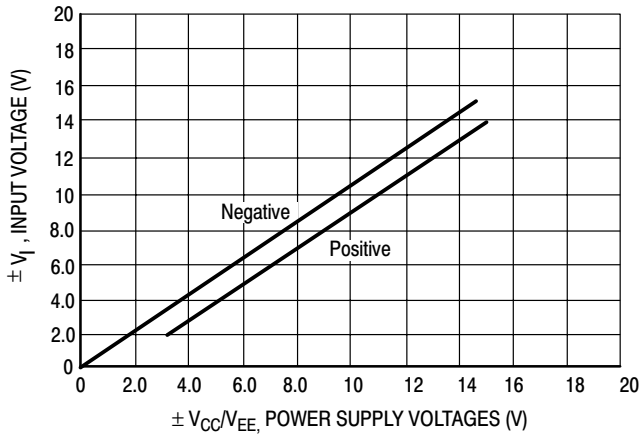


Figure 4. Input Voltage Range

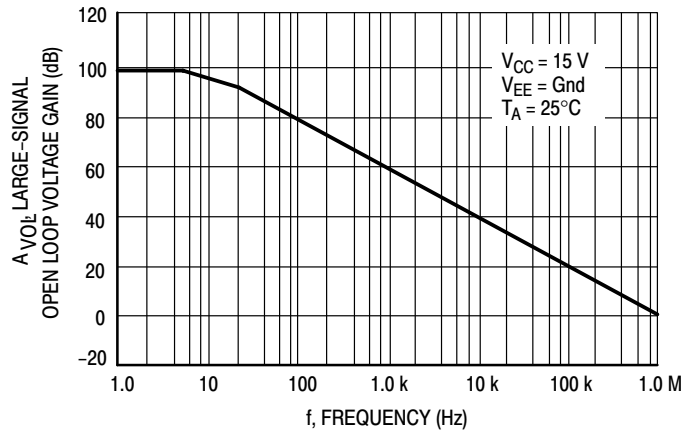


Figure 5. Open Loop Frequency

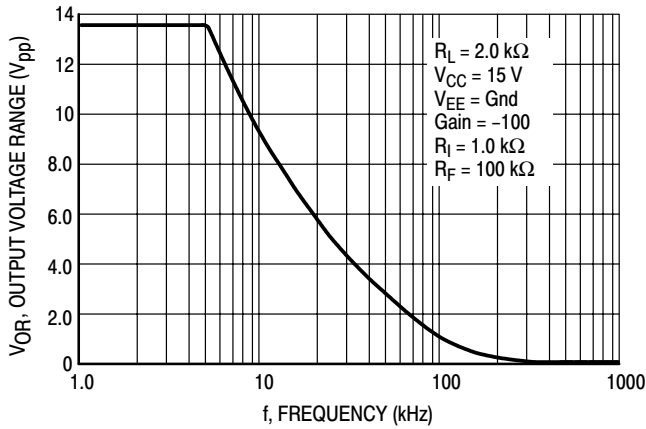


Figure 6. Large-Signal Frequency Response

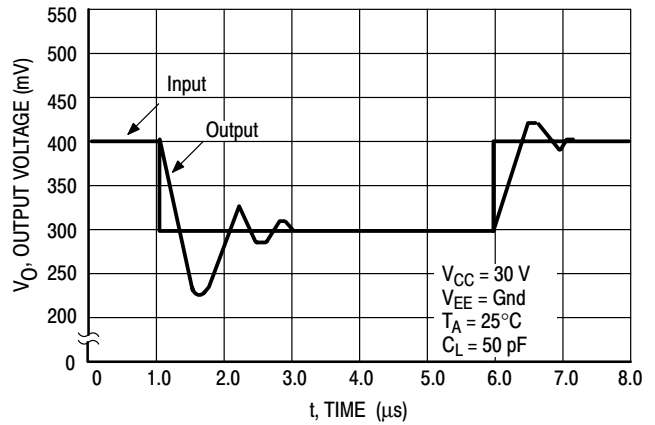


Figure 7. Small-Signal Voltage Follower Pulse Response (Noninverting)

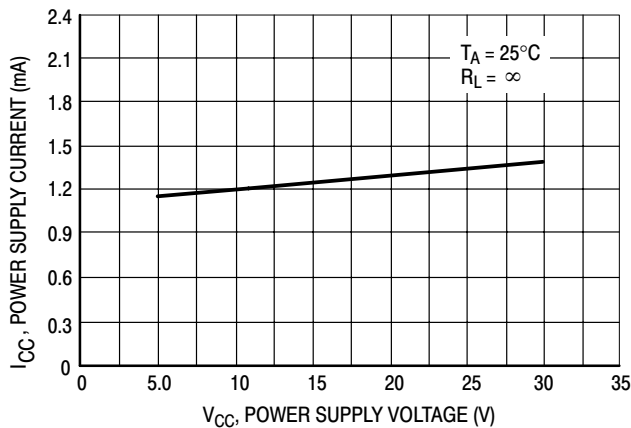


Figure 8. Power Supply Current versus Power Supply Voltage

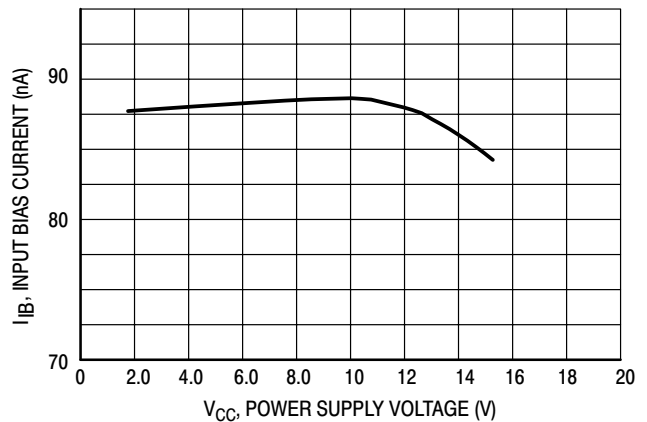


Figure 9. Input Bias Current versus Power Supply Voltage

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

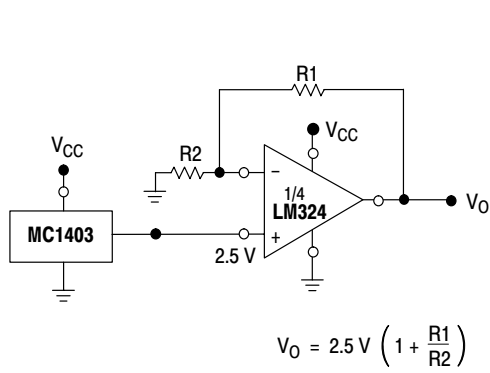


Figure 10. Voltage Reference

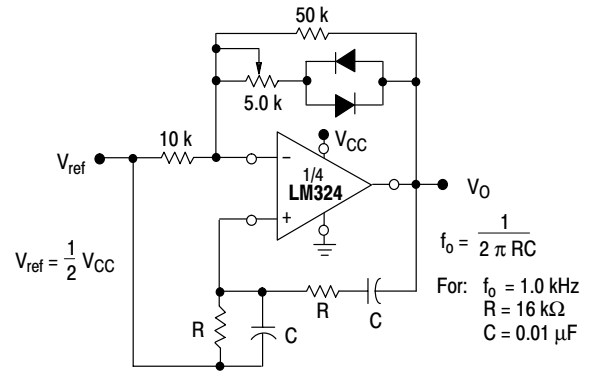


Figure 11. Wien Bridge Oscillator

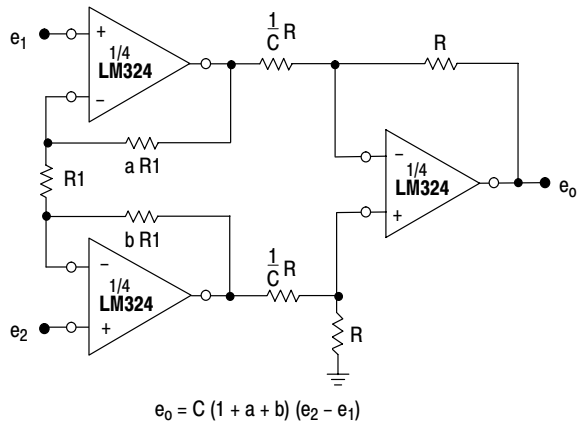


Figure 12. High Impedance Differential Amplifier

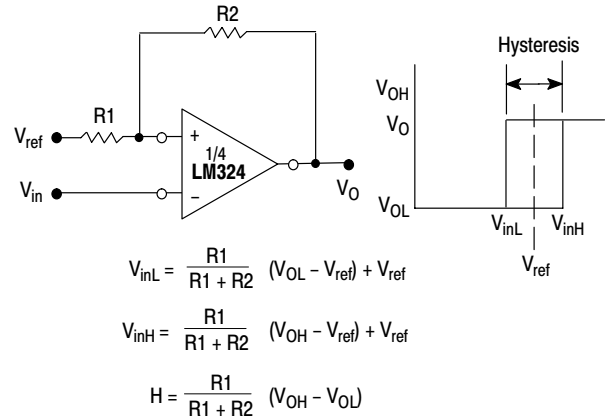


Figure 13. Comparator with Hysteresis

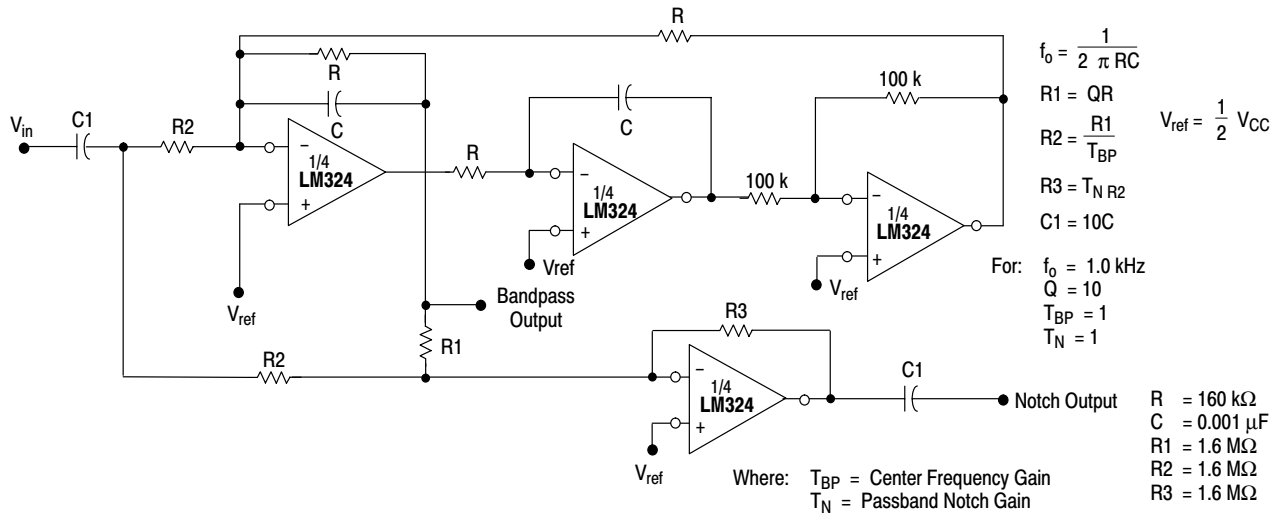


Figure 14. Bi-Quad Filter

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

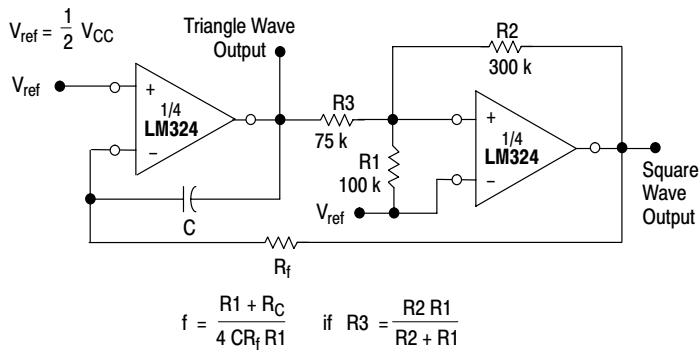


Figure 15. Function Generator

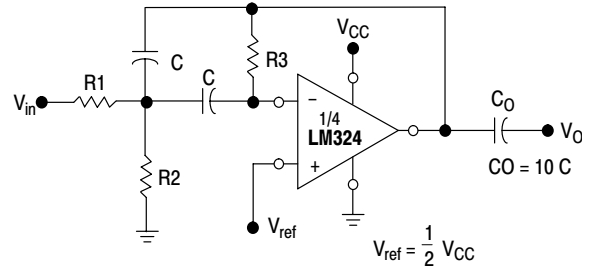


Figure 16. Multiple Feedback Bandpass Filter

Given: f_0 = center frequency
 $A(f_0)$ = gain at center frequency

Choose value f_0, C

$$\text{Then: } R3 = \frac{Q}{\pi f_0 C}$$

$$R1 = \frac{R3}{2 A(f_0)}$$

$$R2 = \frac{R1 R3}{4Q^2 R1 - R3}$$

For less than 10% error from operational amplifier, $\frac{Q_0 f_0}{BW} < 0.1$

where f_0 and BW are expressed in Hz.

If source impedance varies, filter may be preceded with voltage follower buffer to stabilize filter parameters.

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902


ORDERING INFORMATION

Device	Package	Operating Temperature Range	Shipping
LM224D	SO-14	-25° to +85°C	55 Units/Rail
LM224DR2	SO-14		2500 Tape & Reel
LM224DTB	TSSOP-14		96 Units/Rail
LM224DTBR2	TSSOP-14		2500 Tape & Reel
LM224N	PDIP-14		25 Units/Rail
LM324D	SO-14	0° to +70°C	55 Units/Rail
LM324DR2	SO-14		2500 Tape & Reel
LM324DTB	TSSOP-14		96 Units/Rail
LM324DTBR2	TSSOP-14		2500 Tape & Reel
LM324N	PDIP-14		25 Units/Rail
LM324AD	SO-14		55 Units/Rail
LM324ADR2	SO-14		2500 Tape & Reel
LM324ADTB	TSSOP-14		96 Units/Rail
LM324ADTBR2	TSSOP-14		2500 Tape & Reel
LM324AN	PDIP-14		25 Units/Rail
LM2902D	SO-14	-40° to +105°C	55 Units/Rail
LM2902DR2	SO-14		2500 Tape & Reel
LM2902DTB	TSSOP-14		96 Units/Rail
LM2902DTBR2	TSSOP-14		2500 Tape & Reel
LM2902N	PDIP-14		25 Units/Rail
LM2902VD	SO-14	-40° to +125°C	55 Units/Rail
LM2902VDR2	SO-14		2500 Tape & Reel
LM2902VDTB	TSSOP-14		96 Units/Rail
LM2902VDTBR2	TSSOP-14		2500 Tape & Reel
LM2902VN	PDIP-14		25 Units/Rail
NCV2902DR2	SO-14		2500 Tape & Reel


LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

MARKING DIAGRAMS


PDIP-14 N SUFFIX CASE 646

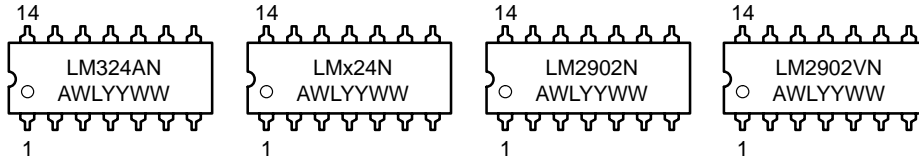

SO-14 D SUFFIX CASE 751A

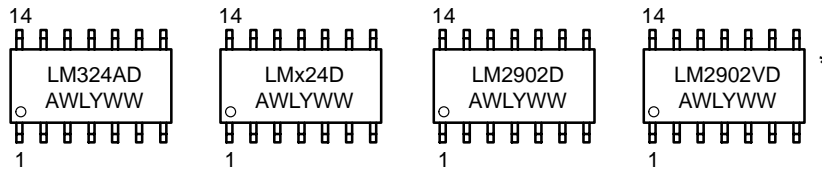

TSSOP-14 DTB SUFFIX CASE 948G

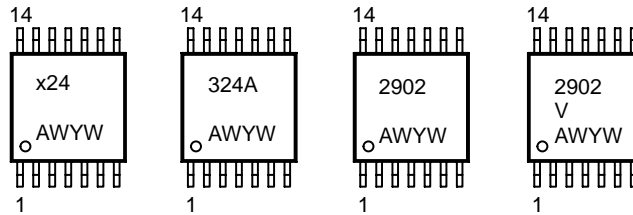


- x = 2 or 3
- A = Assembly Location
- WL = Wafer Lot
- YY, Y = Year
- WW, W = Work Week

*This marking diagram also applies to NCV2902.

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

PACKAGE DIMENSIONS

PDIP-14
N SUFFIX
 CASE 646-06
 ISSUE M

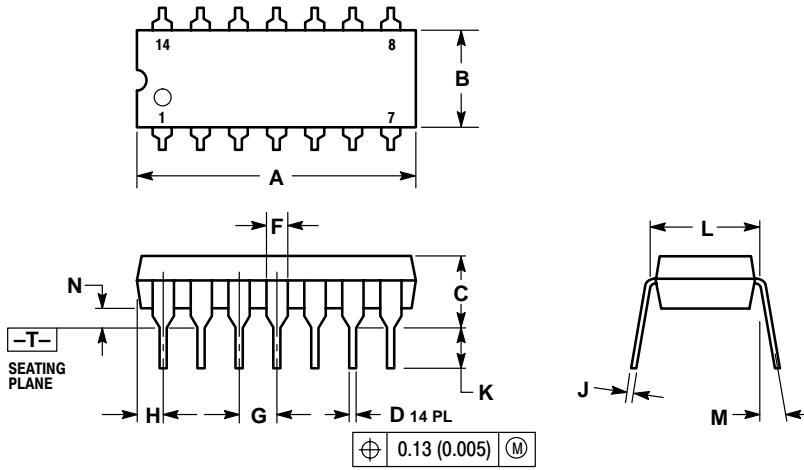


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.715	0.770	18.16	18.80
B	0.240	0.260	6.10	6.60
C	0.145	0.185	3.69	4.69
D	0.015	0.021	0.38	0.53
F	0.040	0.070	1.02	1.78
G	0.100 BSC		2.54 BSC	
H	0.052	0.095	1.32	2.41
J	0.008	0.015	0.20	0.38
K	0.115	0.135	2.92	3.43
L	0.290	0.310	7.37	7.87
M	---	10°	---	10°
N	0.015	0.039	0.38	1.01

SO-14
D SUFFIX
 CASE 751A-03
 ISSUE F

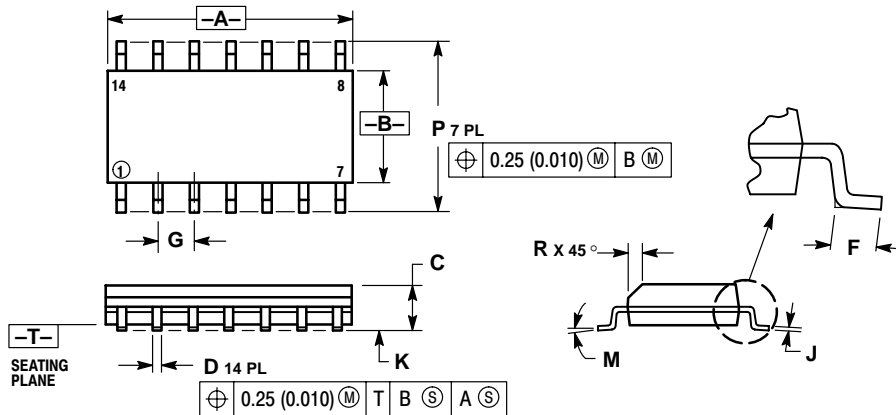

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.55	8.75	0.337	0.344
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.228	0.244
R	0.25	0.50	0.010	0.019

LM324, LM324A, LM224, LM2902, LM2902V, NCV2902

PACKAGE DIMENSIONS

TSSOP-14
DTB SUFFIX
CASE 948G-01
ISSUE O

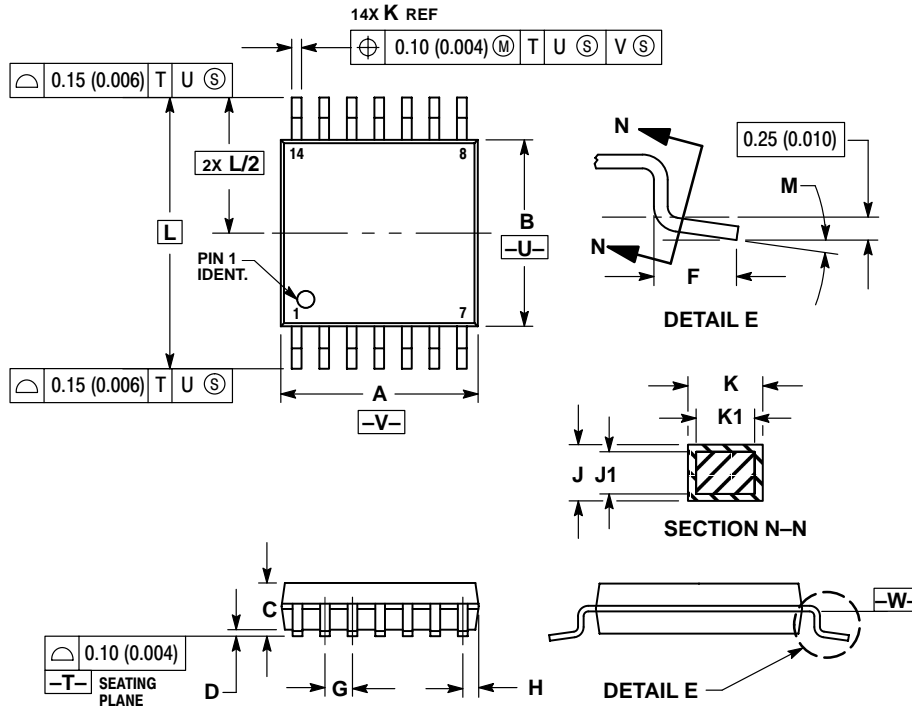

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: MILLIMETER.
- DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
- DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
- DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
- TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
- DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	---	1.20	---	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.50	0.60	0.020	0.024
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0°	8°	0°	8°

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031
Phone: 81-3-5740-2700
Email: r14525@onsemi.com

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.

Miniatur-Beschleunigungsaufnehmer Miniature Accelerometers

1.6.2
Sensoren
Sensors
KS91
KS93

Eigenschaften


- Für leichte Messobjekte
- KS91 in Subminiaturausführung
- KS91 mit IEPE-Spannungsausgang
- KS93 mit Ladungsausgang
- Hoher Dynamikbereich
- Hohe Resonanzfrequenzen
- KS93 mit auswechselbarem Kabel
- KS93 mit M3-Befestigungsgewinde im Boden
- KS91 mit isoliertem Boden gegen Erdschleifen

Properties


- For light test objects
- KS91 in subminiature design
- KS91 with IEPE voltage output
- KS93 with charge output
- Wide dynamic range
- High resonant frequency
- KS93 with replaceable cable
- KS93 with M3 mounting thread in base
- KS91 with insulated base avoiding ground loops



KS91





KS93




		KS91	KS93	
Ausgang • Output		IEPE	Ladung • Charge	
Piezosystem • Piezo design		Scherprinzip • Shear design		
Ladungsübertragungsfaktor • Charge sensitivity	B_{qa}	-	$5 \pm 20\%$	pC/g
Spannungsübertragungsfaktor • Voltage sensitivity	B_{ua}	$10 \pm 20\%$	-	mV/g
Messbereich • Range	a_r / a_i	700	6000	g
Bruchbeschleunigung • Destruction limit	a_{max}	8000	8000	g
Linearer Frequenzbereich • Linear frequency range	f_{3dB}	4 .. 26 000	22 000	Hz
	$f_{10\%}$	8 .. 15 000	12 000	Hz
	$f_{5\%}$	12 .. 10000	9000	Hz
Resonanzfrequenz • Resonant frequency	f_r	> 50 (+25 dB)	> 42 (+25 dB)	kHz
Querrichtungsfaktor • Transverse sensitivity	I_{90MAX}	< 5	< 5	%
Eigenrauschen (Effektivwert; 10 Hz - 50 kHz) • Residual noise (RMS; 10 Hz - 50 kHz)	$a_{n wideband}$	< 3000	-	μg (Hz)
Rauschdichten • Noise densities	10 Hz	a_{n1}	-	$\mu g/\sqrt{Hz}$
	100 Hz	a_{n2}	-	$\mu g/\sqrt{Hz}$
Konstantstromversorgung • Constant current supply	I_{CONST}	2 .. 20	-	mA
Arbeitspunktspannung bei $I_{CONST} = 4$ mA • Output bias voltage at $I_{CONST} = 4$ mA	U_{BIAS}	10 .. 12 V	-	V
Ausgangsimpedanz bei $I_{CONST} = 4$ mA • Output impedance at $I_{CONST} = 4$ mA	r_{OUT}	<50	-	Ω
Kapazität ohne Kabel • Capacitance without cable	C_1	-	0,4	nF
Verhalten gegenüber Umgebungsbedingungen • Environmental characteristics				
Arbeitstemperaturbereich • Operating temperature range	T_{min}/T_{max}	-20 / 120	-20 / 150	°C
Temp.-koeffizient der Lad.-Empfindl. • Temp. coefficient of charge sensitivity	$TK(B_{qa})$	-	0,06	%/K
Temp.-koeffizient der Spg.-Empfindl. • Temp. coefficient of voltage sensitivity	$TK(B_{ua})$	-0,2		
Temp.-koeffizient der Kapazität • Temp. coefficient of capacitance	$TK(C_1)$	-	0,14	%/K
Temperatursprungempfindlichkeit • Temperature transient sensitivity	b_{aT}	2	3	ms^{-2}/K
Messobjektdehnungsempfindlichkeit • Base strain sensitivity	b_{aS}	-	0,2	$ms^{-2}/\mu D$
Magnetfeldempfindlichkeit • Magnetic field sensitivity	b_{aB}	-	1,3	ms^{-2}/T
Mechanische Daten • Mechanical data				
Masse ohne Kabel • Weight without cable	m	1,0 / 0,035	2,7 / 0,095	g / oz
Gehäusematerial • Case material		Alu, Edelstahl Alum. stainl. st.	Titan, Edelstahl Titan., stainl. st.	
Kabelanschluss • Cable connection		radial	radial	
Anschlusskabel / -buchse • Connection cable / socket		fest / integral ⁽¹⁾	Subminiatur M3	
Befestigung • Mounting		Kleben / adhesive	M3 Gew. / thread	
Isolation • Insulation		ja / yes	nein / no	

(1) KS91 hat 1,5 m fest angebrachtes Kabel mit UNF 10-32-Stecker
KS91 has 1.5 m integral cable with UNF 10-32 plug


Typischer Frequenzgang Typical Amplitude Response

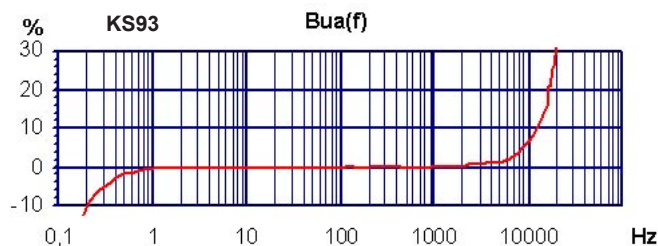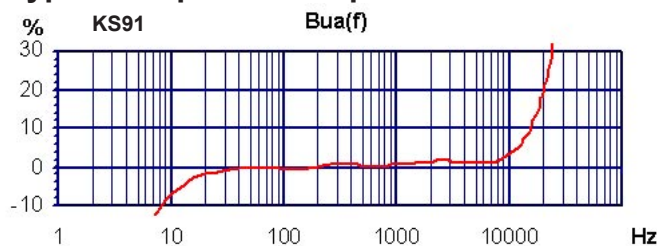

Temperaturverhalten Temperature Characteristics



Rauschverhalten Noise Characteristics



Passendes Zubehör • Suitable Accessories

	KS91	KS93
Anschluss-zubehör	<ul style="list-style-type: none"> • 010-UNF-BNC-5/10: Kabel UNF 10-32 / BNC; 5 / 10 m lang (zur Verlängerung) • 016: Kupplung für 2 UNF 10-32-Stecker • 017: Adapter UNF 10-32 / BNC (männlich) • 117: Adapter UNF 10-32 / BNC (weiblich) • 025: Adapter UNF 10-32 / TNC (männlich) 	<ul style="list-style-type: none"> • 009-SUB-UNF-1,5: Störfreies Kabel Subminiatur / UNF 10-32; 1,5 m lang; 120 °C • 009/T-SUB-UNF-1,5: Störfreies Kabel Subminiatur / UNF 10-32; 1,5 m lang; 200 °C • 010-UNF-BNC-10: Störfreies Kabel UNF 10-32 / BNC; 5 / 10m lang (zur Verlängerung) • 016: Kupplung für 2 UNF 10-32-Stecker • 017: Adapter UNF 10-32 / BNC (männlich) • 117: Adapter UNF 10-32 / BNC (weiblich) • 025: Adapter UNF 10-32 / TNC (männlich)
Connection accessories	<ul style="list-style-type: none"> • 010-UNF-BNC-5/10: cable UNF 10-32 / BNC; 5 / 10 m long (for extension) • 016: Coupler for 2 UNF 10-32 plugs • 017: Adapter UNF 10-32 / BNC (male) • 117: Adapter UNF 10-32 / BNC (female) • 025: Adapter UNF 10-32 / TNC (male) 	<ul style="list-style-type: none"> • 009-SUB-UNF-1,5: Low noise cable Subminiature / UNF 10-32; 1.5 m long; 80 °C • 009/T-SUB-UNF-1,5: Low noise cable Subminiature / UNF 10-32; 1.5 m long; 200 °C • 010-UNF-BNC-10: Low noise cable UNF 10-32 / BNC; 5 / 10 m long (for extension) • 016: Coupler for 2 UNF 10-32 plugs • 017: Adapter UNF 10-32 / BNC (male) • 117: Adapter UNF 10-32 / BNC (female) • 025: Adapter UNF 10-32 / TNC (male)
Befestigungs-zubehör	<ul style="list-style-type: none"> • 002: Klebewachs 	<ul style="list-style-type: none"> • 002: Klebewachs • 021: Gewindestift M3 • 106: Isolierflansch M3 • 129: Isolierendes Klebepad M3 • 022: Gewindeadapter M3 / M5 • 108: Haftmagnet M3 • 130: Triaxial-Befestigungswürfel M3 • 140: Handgriffadapter für gekrümmte Oberflächen
Mounting accessories	<ul style="list-style-type: none"> • 002: Adhesive wax 	<ul style="list-style-type: none"> • 002: Adhesive wax • 021: Mounting stud M3 • 106: Insulating flange M3 • 129: Insulating adhesive pad M3 • 022: Thread adapter M3 / M5 • 108: Magnetic base M3 • 130: Triaxial mounting cube M3 • 140: Handle adapter for curved surfaces

Bestellinformation • Ordering Information

KS93/01: Aufnehmer mit Zubehöretui; Inhalt: Kabel 009-SUB-UNF-1,5, Adapter 017, Gewindestift 021, Klebewachs 002, Isolierflansch 106, Klebepad 129, Haftmagnet 108, Bedienungsanleitung, Kennblatt
 Sensor with accessories kit including cable 009-SUB-UNF-1,5, adapter 017, mounting stud 021 adhesive wax 002, insulating flange 106, adhesive pad 129, magnetic base 108, instruction manual, data sheet

KS91; KS93: Aufnehmer mit Kennblatt
 Sensor with data sheet

Hinweis: Auf Wunsch liefern wir unsere Aufnehmer mit einem kostengünstigen DKD-Kalibrierzertifikat. Preise auf Anfrage.
 Änderungen vorbehalten.

Note: Our transducers can be supplied with an attractively priced calibration certificate of DKD. Prices on demand.
 Specifications subject to change without prior notice.

Manfred Weber

Metra Meß- und Frequenztechnik in Radebeul e.K.

Meißner Str. 58
 D-01445 Radebeul
 Tel. +49-(0)351-836 2191

P.O.Box 01 01 13
 D-01435 Radebeul
 Fax: +49-(0)351-836 2940

Ausgabe / Edition: 01/12

Internet: www.MMF.de
 Email: Info@MMF.de