

---

# Mathematical Principles in Visual Computing

## Projective Geometry – Geometric Relations

Prof. Friedrich Fraundorfer

SS 2021

# Outline

---

- Epipolar constraint derivation
- Stereo normal case
- Triangulation
- Camera pose estimation


# Learning goals

---

- Understand and derive the epipolar constraint
- Understand the geometric concept of the epipolar plane
- Understand triangulation
- Understand camera pose estimation

# Epipolar constraint

- The epipolar constraint is a mathematical relationship between the point correspondences of two images

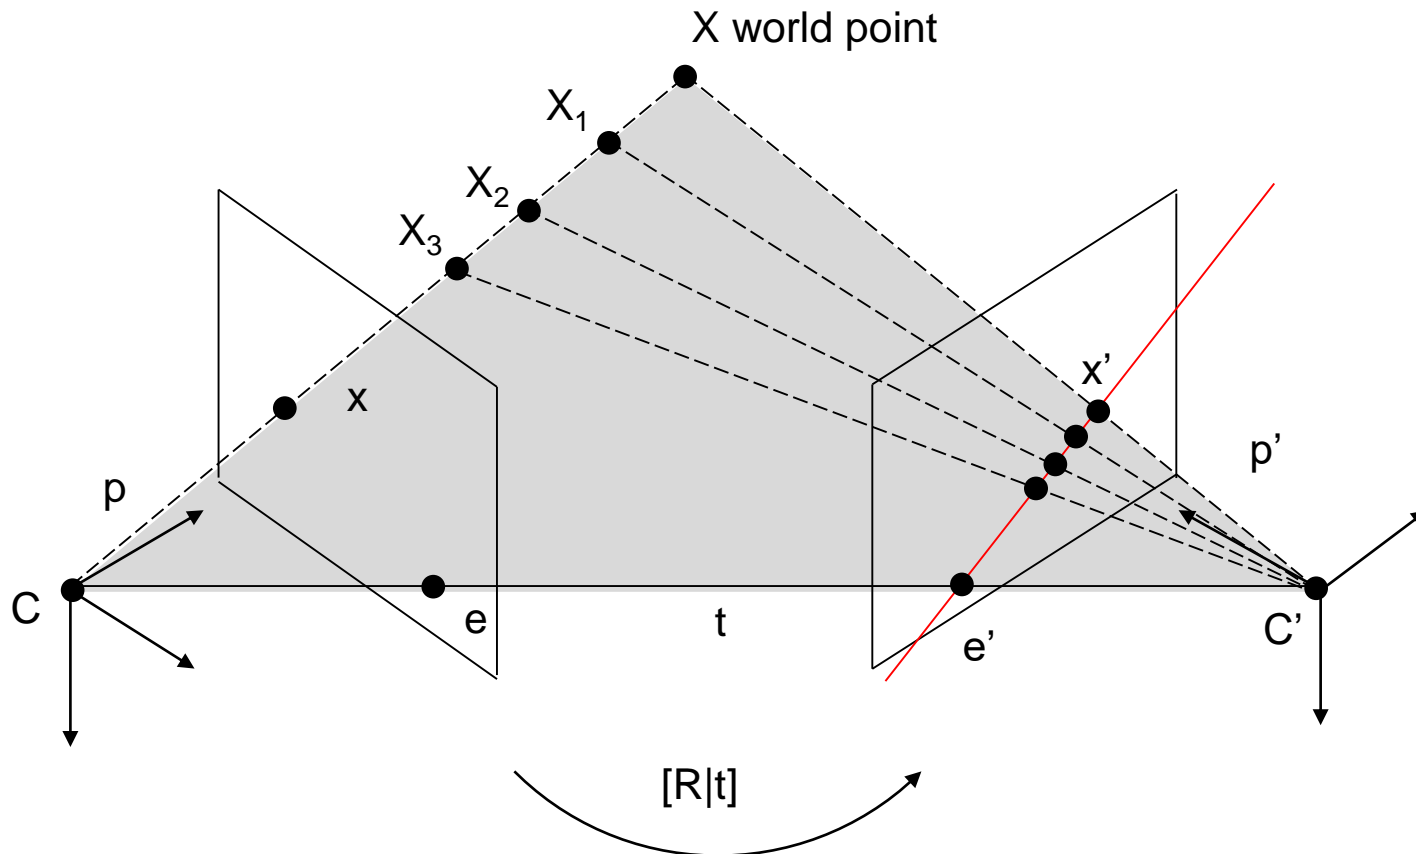


## Epipolar constraint – derivation by coplanarity condition


---

- Vector  $p$  and  $t$  define a plane
- Vector  $p'$  and  $t$  define also a plane
- Both planes must have the same normal
- What we seek is a relation between  $p$  and  $p'$


# Epipolar constraint – derivation by coplanarity condition

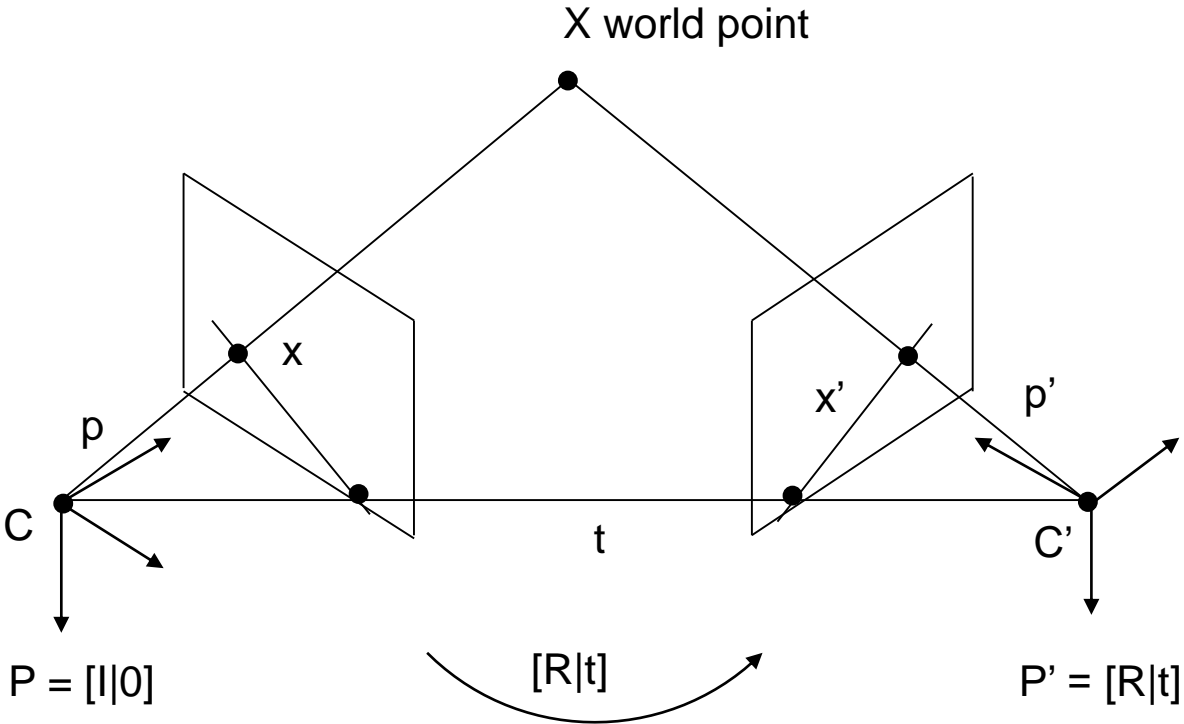

# Epipolar constraint – derivation by coplanarity condition

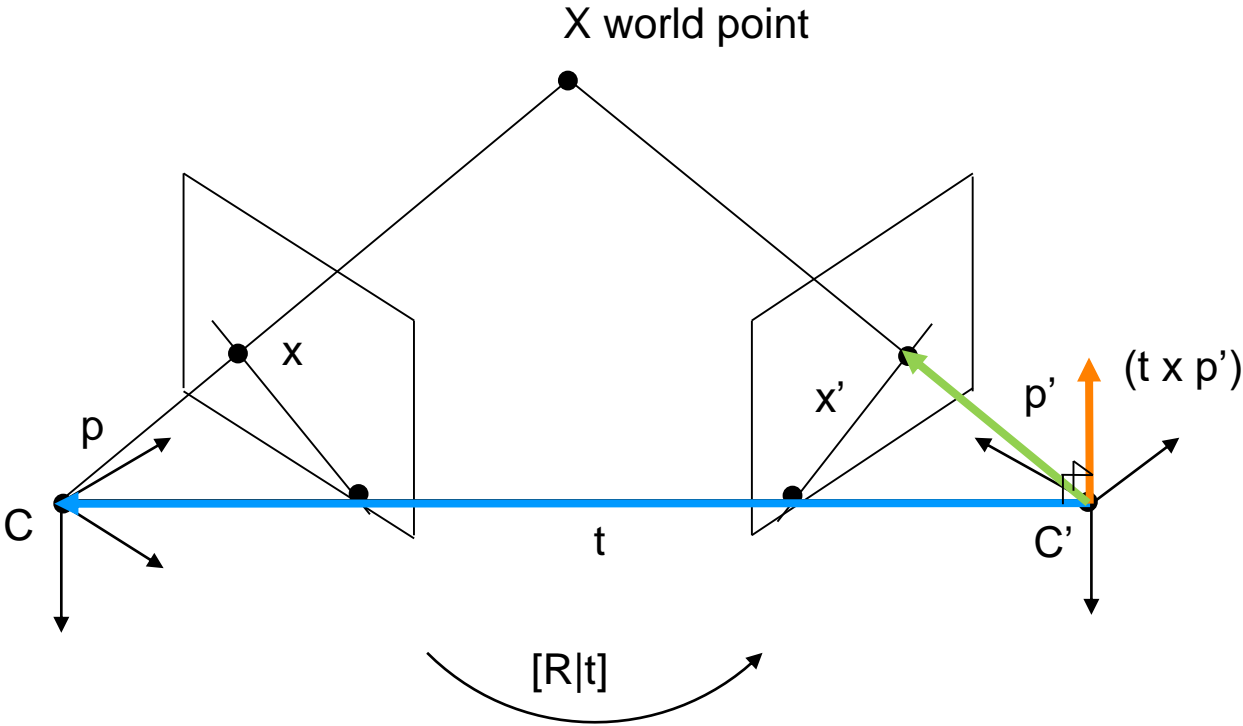


# Epipolar constraint – derivation by coplanarity condition

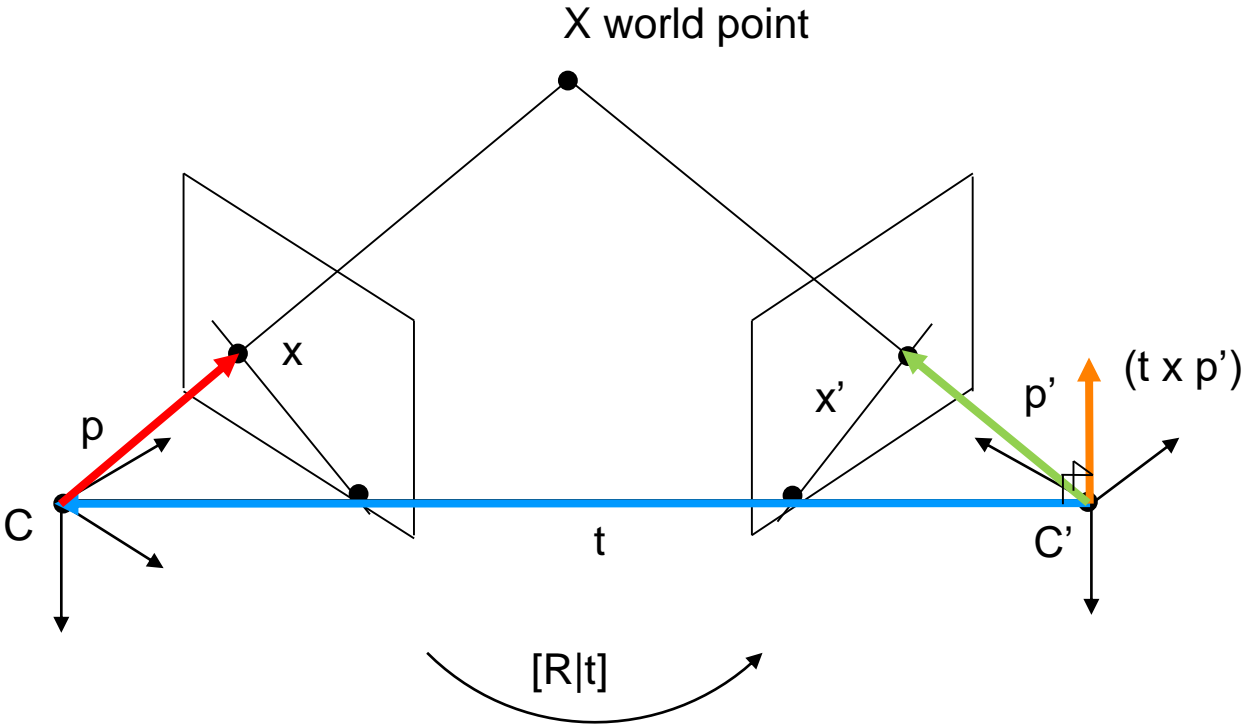




# Epipolar constraint – derivation by coplanarity condition

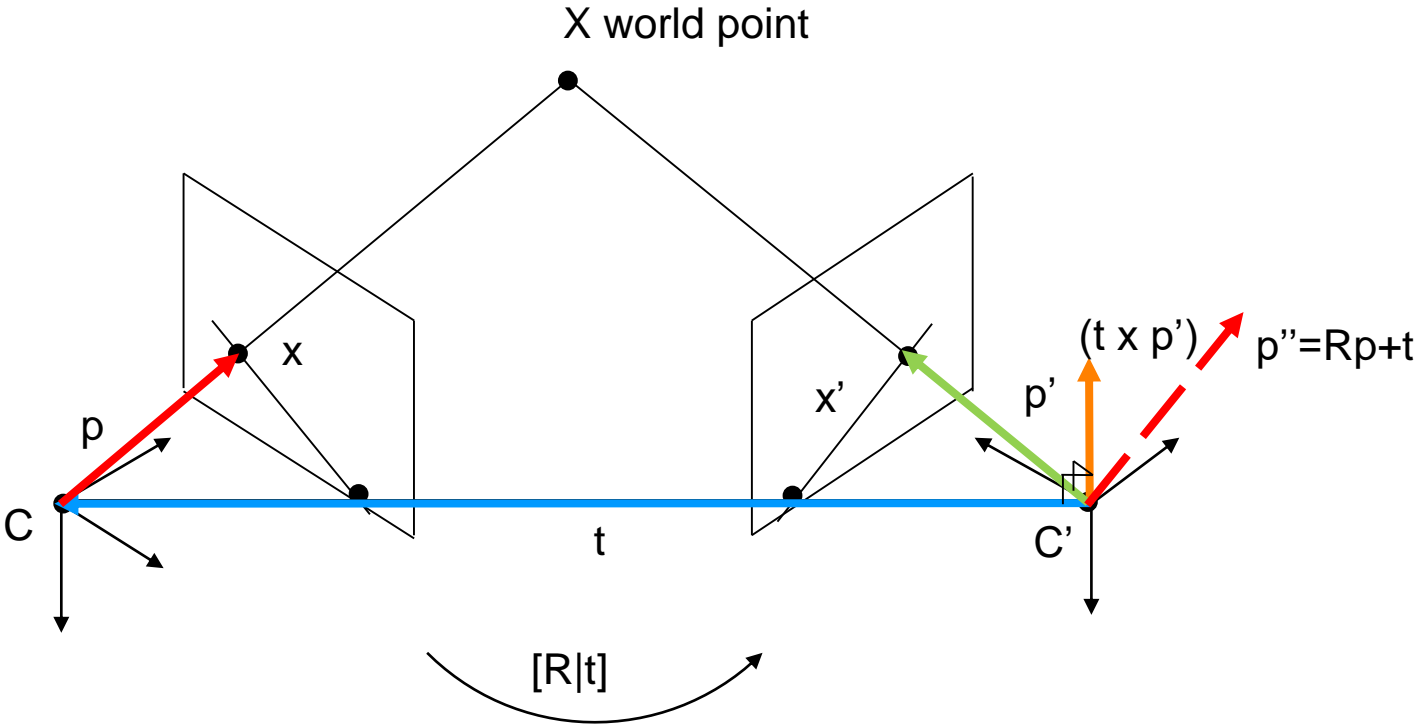

# Epipolar constraint – derivation by coplanarity condition

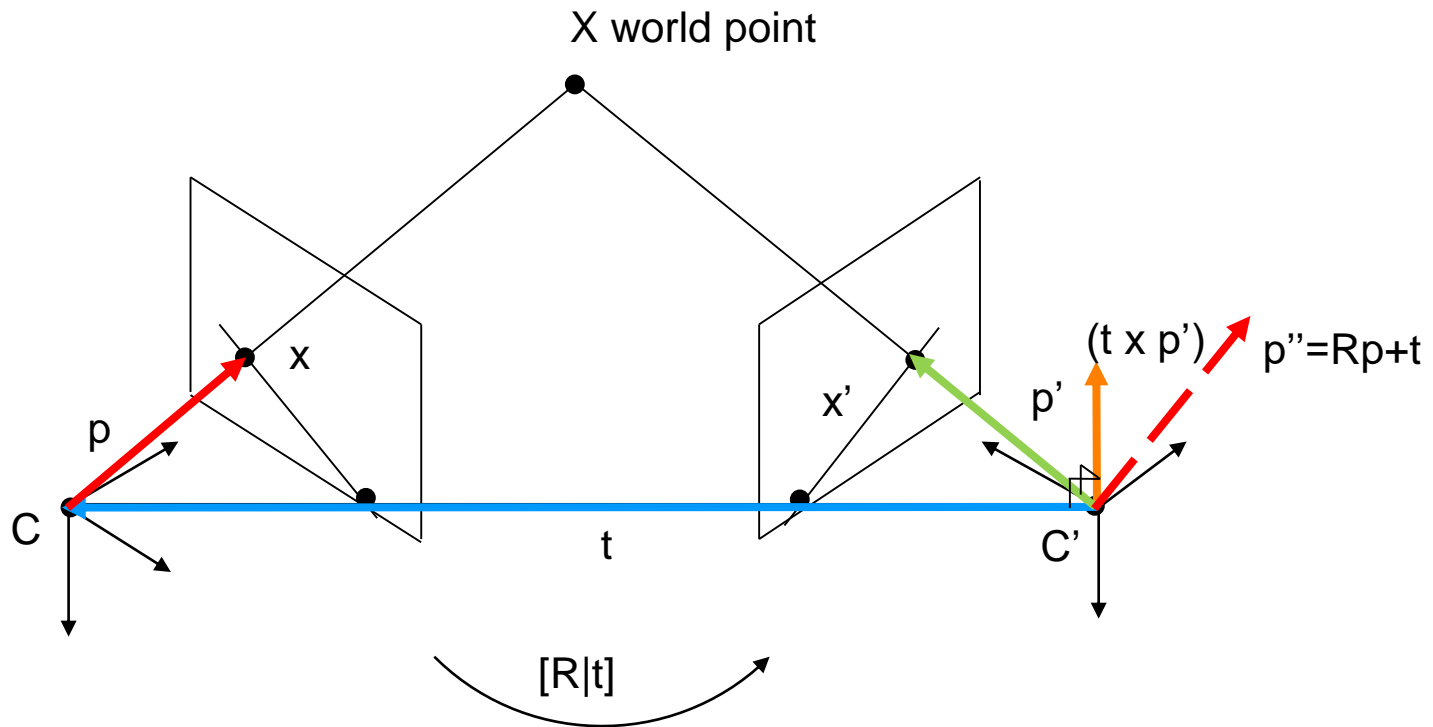

$$\begin{aligned}
 t \times p' &= t \times p'' \\
 t \times p' &= t \times (Rp + t) \\
 \text{with } p'' &= Rp + t \\
 t \times p' &= t \times Rp + t \times t \\
 p'^T (t \times p') &= 0 \\
 p'^T (t \times Rp) &= 0
 \end{aligned}$$

$$p'^T \underbrace{[t]_x Rp}_{E} = 0$$

$$p'^T E p = 0$$

E is called the Essential matrix

# Fundamental matrix

---

- $p, p'$  from the Essential matrix derivation are in normalized coordinates
- $x, x'$  are image coordinates,  $x = Kp$ ,  $x' = Kp'$
- By replacing  $p, p'$  with  $x, x'$  one gets the Fundamental matrix

$$p = K^{-1}x$$

$$p' = K^{-1}x'$$

$$p'^T E p = 0$$


$$x'^T K^{-T} E K^{-1} x = 0$$

$$x'^T F x = 0$$


$$F = K^{-T} E K^{-1}$$

# Epipolar lines

- The corresponding line  $l'$  to image coordinate  $x$
- $l'$  is the line connecting the epipole  $e'$  and the image coordinate  $x'$
- Hypothesis:  $l' = Fx$
- Point  $x'$  must lie on  $l'$ , thus  $x'^T l' = 0$
- Now  $x'^T Fx = 0$

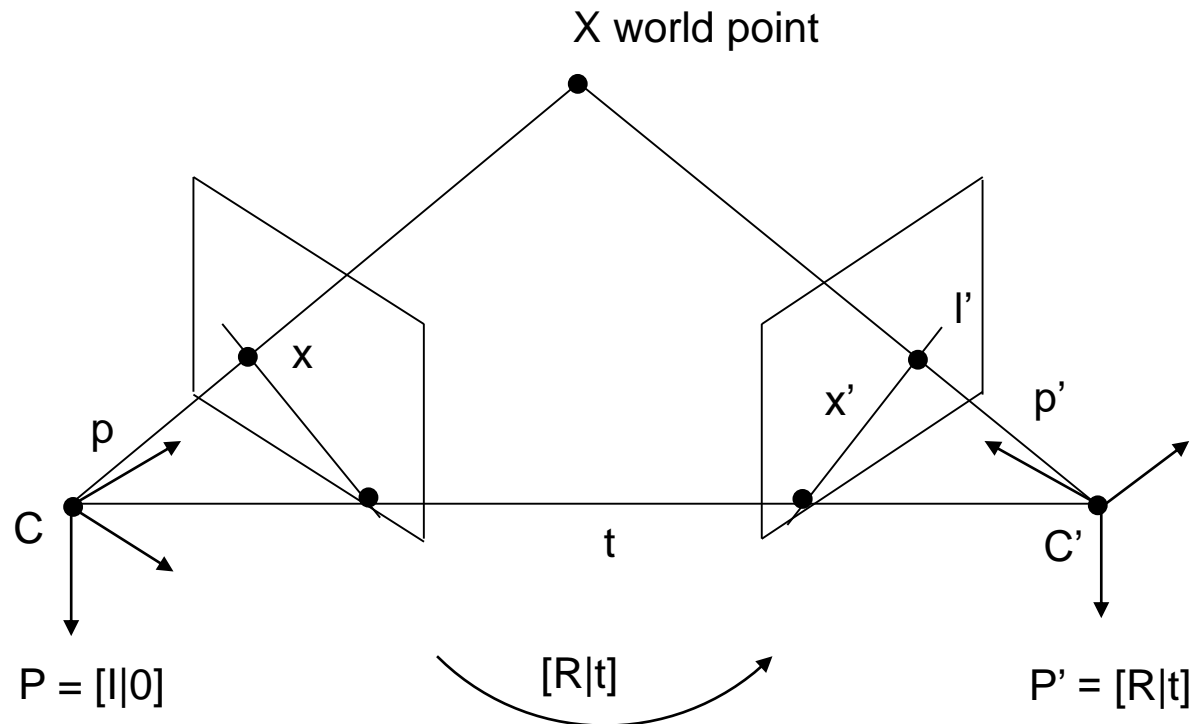


# Stereo case

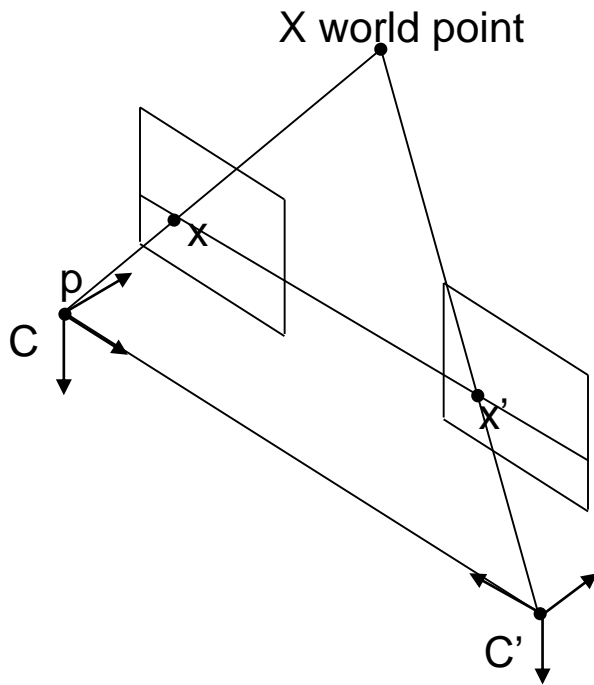

$$R = I_{3 \times 3} \quad T = [T_x \quad 0 \quad 0]^T$$

# Stereo case

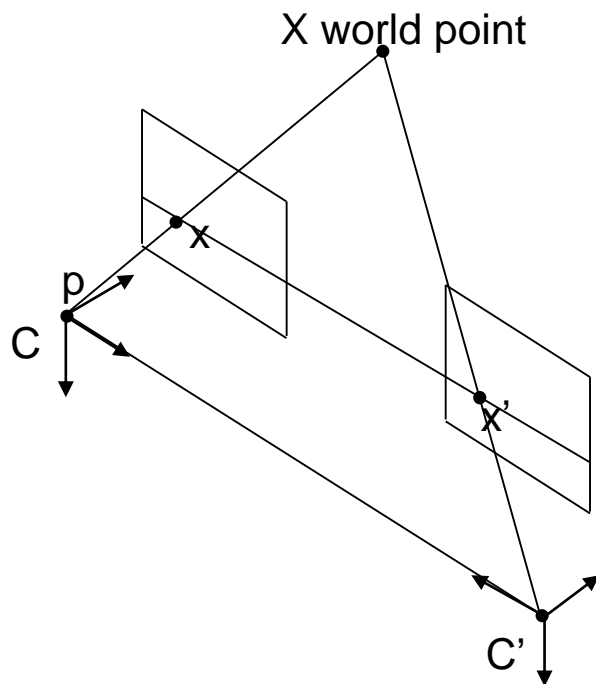

$$R = I_{3 \times 3} \quad T = [T_x \quad 0 \quad 0]^T$$


$$E = [T]_x R = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & -T_x \\ 0 & T_x & 0 \end{bmatrix}$$

$$[x' \quad y' \quad 1] \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & -T_x \\ 0 & T_x & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} = 0$$

$$[x' \quad y' \quad 1] \begin{bmatrix} 0 \\ -T_x \\ T_x y \end{bmatrix} = 0$$


$$-y' T_x + T_x y = 0$$

# Triangulation

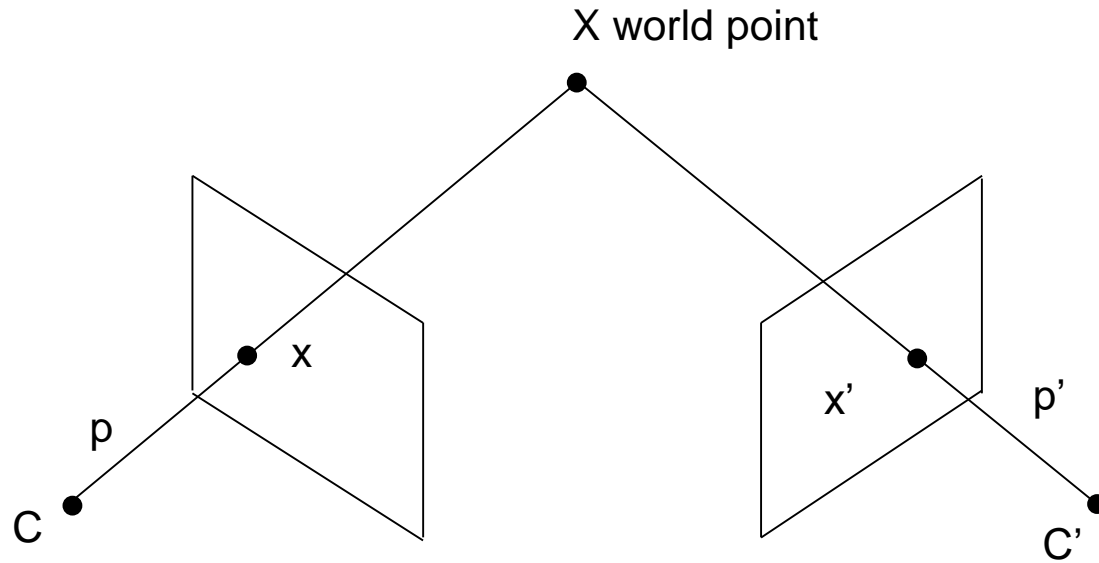

- Compute coordinates of world point  $X$  given the measurements  $x$ ,  $x'$  and the camera projection matrices  $P$  and  $P'$


# Triangulation

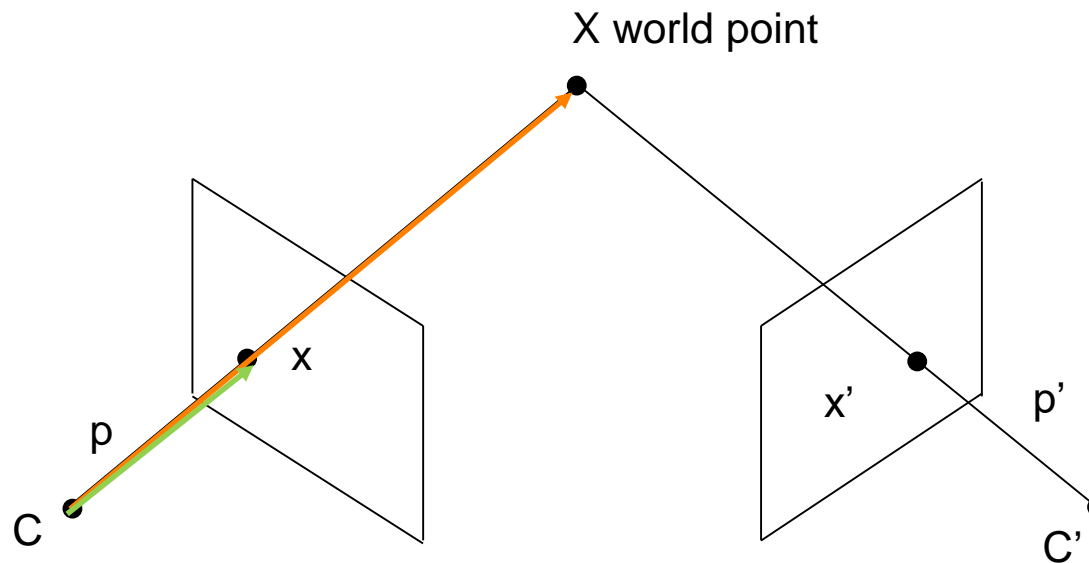

- Condition: Measurement vector  $x$  needs to have the same direction as projection of  $X$  (cross-product equals 0)
- $x \times (PX) = 0$  and  $x' \times (P'X) = 0$
- Can be rewritten into equation system  $AX = 0$  to solve for  $X$



# Triangulation

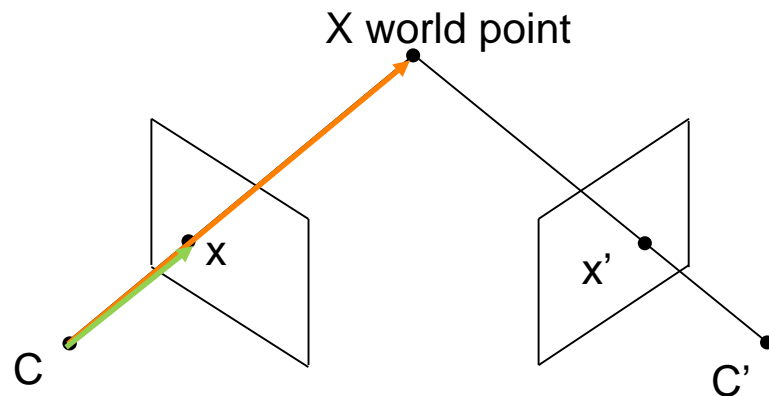

$$x \times (PX) = 0 \text{ and } x' \times (P'X) = 0$$

$$x(P_3^T X) - (P_1^T X) = 0$$


$$y(P_3^T X) - (P_2^T X) = 0$$

$$x(P_2^T X) - y(P_1^T X) = 0$$

$$P = \begin{bmatrix} P_1^T \\ P_2^T \\ P_3^T \end{bmatrix}$$


$$\begin{bmatrix} xP_3^T - P_1^T \\ yP_3^T - P_2^T \\ x'P_3'^T - P_1'^T \\ y'P_3'^T - P_2'^T \end{bmatrix} X = 0$$

# Camera pose estimation

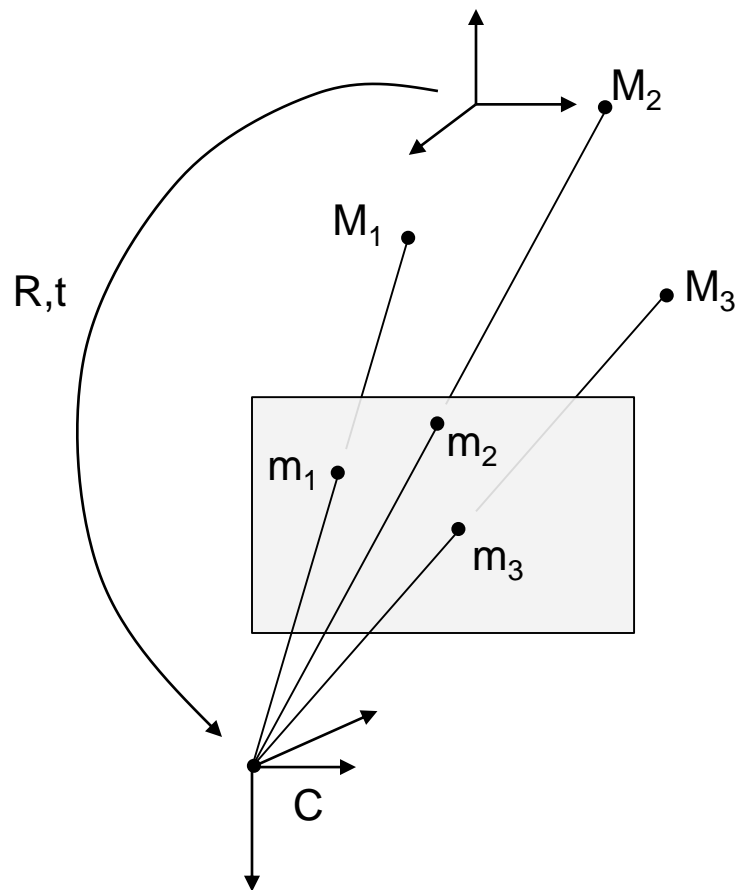


- perspective-n-point problem
- Goal is to estimate camera matrix  $P$  such that  $m_1 = PM_1$
- $m_1, M_1, m_2, M_2, m_3, M_3$  are known
- Algebraic linear solution requires 6 3D-2D point correspondences, minimal nonlinear solution requires only 3

# Camera pose estimation

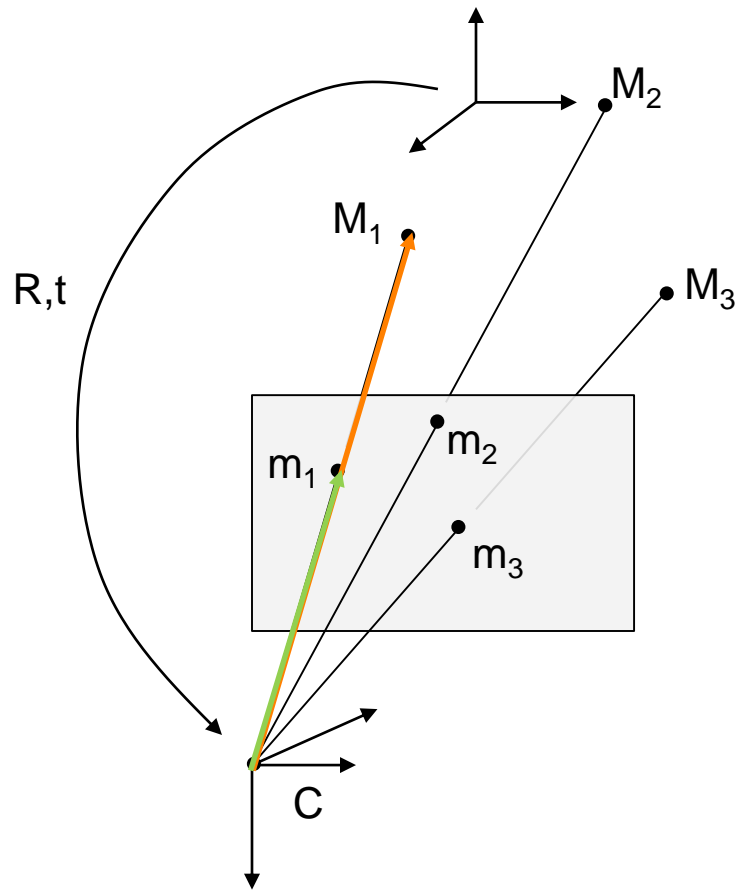

- Derivation similar to Triangulation, but now entries of  $P$  are the unknowns instead of  $X$
- Condition: Measurement vector  $x$  needs to have the same direction as projection of  $X$  (cross-product equals 0)

# Camera pose estimation

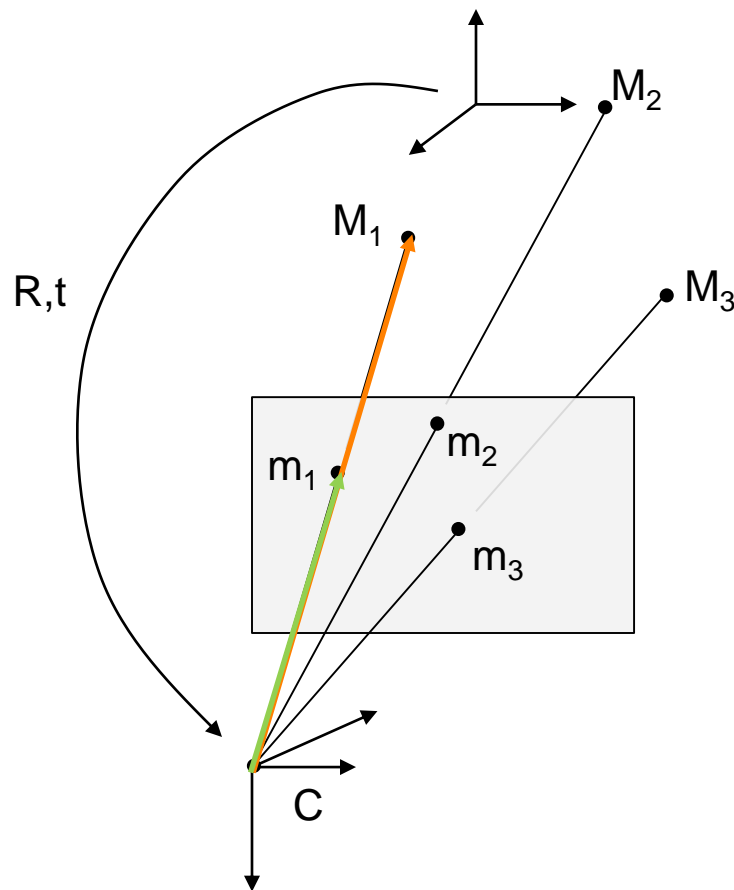

- Derivation similar to Triangulation, but now entries of  $P$  are the unknowns instead of  $X$
- Condition: Measurement vector  $x$  needs to have the same direction as projection of  $X$  (cross-product equals 0)

$x \times (PX) = 0$  for all pairs  $x \leftrightarrow X$

$$y(P_3^T X) - w(P_2^T X) = 0$$

$$x(P_3^T X) - w(P_1^T X) = 0$$

$$x(P_2^T X) - y(P_1^T X) = 0$$

$$\begin{bmatrix} 0 & -wX^T & yX^T \\ -wX^T & 0 & xX^T \\ -yX^T & xX^T & 0 \end{bmatrix} \begin{bmatrix} P_1 \\ P_2 \\ P_3 \end{bmatrix} = 0$$

## Recap - Learning goals

---

- Understand and derive the epipolar constraint
- Understand the geometric concept of the epipolar plane
- Understand triangulation
- Understand camera pose estimation